

City of Mt. Pleasant, Michigan

CONTRACT DOCUMENTS

For Construction
of
2016 Water Main Project



KATHLEEN LING
Mayor

NANCY RIDLEY
City Manager

Prepared By:
Division of Public Works

JOHN ZANG
DPW Director

JANUARY 2016

City of Mt. Pleasant, Michigan

T A B L E O F C O N T E N T S

2016 Water Main Project

Bidding Information

Notice to Bidders
Instructions to Bidders
Insurance Requirements

Contract Documents

Proposal

Technical Specifications

Supplemental Specifications
Special Provisions
DPW Policy for Replacing Private Items and Systems in the Public Right-of-Way, Resulting from Construction Damage or Street and Utility Maintenance
Truck Route Map
Details



THE CITY OF MT. PLEASANT, MICHIGAN

CITY HALL

320 W. Broadway • 48858-2447
(989) 779-5300
(989) 773-4691 fax

PUBLIC SAFETY

804 E. High • 48858-3595
(989) 779-5100
(989) 773-4020 fax

PUBLIC WORKS

1303 N. Franklin • 48858-4682
(989) 779-5400
(989) 772-6250 fax

NOTICE TO BIDDERS

2016 Water Main Project

The City of Mt. Pleasant, Michigan, is requesting sealed bids at the Office of the City Clerk, City Hall, 320 W. Broadway Street, Mt. Pleasant, Michigan 48858, until 1:30 p.m. (local time), on February 16, 2016, at which time and place the bids will be publicly opened and read. All bids shall be submitted in a sealed envelope, plainly marked "2016 Water Main Project – February 16, 2016."

Proposals are solicited on a unit price basis, for the following work (approx. quantities):

8" Water Main, Bored 972 LFT (Base Bid)
8" Water Main, Bored 1,020 LFT (Add Alternate Bid)

Should bids come in favorable, the Base Bid and the Add Alternate Bid will be added together into one project.

All bid proposals must be accompanied by a bid bond, bank cashier's check, bank draft, or certified check for not less than five percent (5%) of the bid price, made payable to the City of Mt. Pleasant.

To view and download complete Plans and Specifications at no charge, visit the City of Mt. Pleasant website at [.mt-pleasant.org](http://www.mt-pleasant.org) and navigate to the Bids and Quotes page.

A non-refundable \$50.00 fee is required for plans and specifications picked up at the Public Works Building, 1303 N. Franklin Street, Mt. Pleasant, Michigan 48858, (989) 779-5401, Monday through Friday, 8:00 a.m. to 4:30 p.m. A non-refundable \$60.00 fee is required for plans and specifications that must be mailed.

The City of Mt. Pleasant reserves the right to accept or reject any or all bids, to waive any irregularities in the bids, and to select the bid considered most advantageous to the City.

Stacie Tewari
City Engineer
(989) 779-5404

Jeremy Howard
City Clerk

City of Mt. Pleasant, Michigan
INSTRUCTIONS TO BIDDERS

1. **Proposals**

Proposals must be made upon the forms provided therefore, with the Bid amount both written and shown in figures, and all other data required submitted.

The Proposal, bound together with all Proposal Documents, must be enclosed in a sealed envelope marked as specified in the Notice to Bidders for such Bid and clearly indicating the name and address of the Bidder and must be received by the City Clerk, City Hall, 320 West Broadway Street, Mt. Pleasant, Michigan 48858, no later than the time and date specified in the Notice to Bidders. At such specified time, Proposals shall be publicly opened and read aloud.

2. **Basis of Proposals**

Proposals are solicited on the basis of unit price(s) and/or lump sum(s), as specified on the Proposal form.

The City of Mt. Pleasant (also referred to as "Owner"), reserves the right to accept any Bid, to reject any or all Bids, to waive any irregularities in the Bids, and to select the Bid considered most advantageous to the city.

3. **Comparison of Bids**

In comparing Bids, consideration shall be given to the time proposed for completion of the Contract, qualifications of Bidder, price differentials, alternate Proposals for the alternate items listed in the Proposal (if applicable), and any other pertinent factors. **The City of Mt. Pleasant grants a preference to businesses located within the Mt. Pleasant City Limits. The preference given is a differential above the low bid if the low bid is not from a City of Mt. Pleasant bidder. The differential allowed is 3% of the total for bids between \$5,000 and \$9,999 and 2% of the total for bids over \$10,000. The maximum credit allowed is \$1500.00.** The Owner reserves the right to make an award to the Bidder whose Proposal is deemed to be in the best interest of the Owner.

4. **Time**

Time is of the essence in the performance of the Contract, and each Bidder, by submitting a Proposal, certifies his/her acceptance of the time allowed by the Contract for the completion of the work specified.

5. **Indemnification**

The Contractor shall save and hold harmless the city and its employees from and against all claims, damages, losses, or expenses, including attorney's fees, arising out of or resulting from the performance of the work; provided that any such claim, damage, loss or expense is caused in whole or in part by any negligent or willful act of omission of the contractor, subcontractor, employee, or anyone under their direction. The Contractor shall at his/her own expense, defend any and all such actions and shall pay all attorney's fees, costs, and expenses pertaining thereto.

6. **Bid Deposits**

Each Proposal shall be accompanied by a certified check, bank cashier's check, bank draft, or a Bid Bond by a recognized Surety Company similar to a U. S. Government Standard Form Bid Bond, in the amount of five percent (5%) of the total amount of the Bid, made payable to the City of Mt. Pleasant, subject to forfeiture to the Owner in the event of failure on the part of the successful Bidder to enter into the attached form of agreement to do the work specified by said Proposal at the price and within the time stated therein. The Bid Deposit of all Bidders, except the three (3) lowest acceptable Bidders, shall be returned within two (2) weeks after opening of bids. The bid deposits of the three (3) lowest acceptable bidders shall be returned within 48 hours after the executed Contract(s) have been finally approved by the Owner.

7. **Liquidated Damages**

A liquidated damage clause, as given in the Contract form, provides that the Contractor shall pay the Owner as liquidated damages, and not as a penalty, the amount as indicated in Section 108.10 of the 2012 MDOT Standard Specifications for Construction for each and every calendar day that the Contractor may be in default of substantial completion of the work required under said Contract.

8. **Insurance and Bonds**

The successful Bidder will be required to execute (2) Bonds, in the form attached hereto, with Surety acceptable to the Owner and insurance, as follows:

- a. Bond in the amount of 100% of the Estimated Contract Price running to the City of Mt. Pleasant, Michigan, to insure the completion of the entire work, according to the statutes of the State of Michigan in effect at that time.
- b. Bond in the amount of 100% of the Estimated Contract Price running to the People of the State of Michigan for the protection of Subcontractors and Labor and Material Men, according to the statutes of the State of Michigan in effect at that time.
- c. Insurance in the amounts required by City Ordinance as specified in the Section 1 - General Construction Specifications, attached hereto.

The successful bidder shall be required to furnish for each set of executed Contract Documents, and conformed copies thereof, an original conformed Performance Bond, Labor and Materials Bond, and Insurance Certificates.

9. **Permits and Local Codes**

The Owner shall procure the required permits for municipal sanitary sewer construction, municipal water system construction, and soil erosion control.

The Contractor shall obtain, at his/her expense, all other required local construction permits and shall comply with local building code and inspection requirements.

10. **Qualifications of Bidders**

It is the intent of the Owner to award the Contract to a Bidder fully capable, both financially and with regard to experience, to perform and complete all work in a satisfactory and timely manner. Evidence of such competency must be furnished on the forms included in the proposal, listing projects of similar difficulty, scope of work, and size, which the Bidder has satisfactorily undertaken and completed.

It is the intention of the City to award the contract to a Contractor whose ability and financial resources are fully equal to the task of performing the work in a satisfactory manner. With this in view, the Proposal calls for at least five (5) references, using specific names of persons to contact concerning the Contractor's ability to do this particular class of work. References from municipalities are preferred. The mere ability to furnish a Performance Bond shall not be accepted as sufficient evidence of responsibility on the part of the Bidder. The Bidder may also be required to furnish evidence of his current financial status.

11. **Interpretation of Documents**

If any Bidder is in doubt as to the true meaning of any part of the Plans, Specifications or any Contract Document, he/she may submit to the Owner a written request for an interpretation thereof. Any interpretation made in response to such a query shall be made only by Addendum, duly issued, and a copy of such Addendum shall be mailed or duly delivered to each prospective Bidder. The Owner shall not be responsible for any other explanation or interpretation of the Contract Documents. Alternative proposals that are suggested by bidders will be given consideration, if presented before the bid opening. If accepted, an addendum will be issued and sent out to all potential bidders, so that they may bid on the alternatives that have been identified.

12. **Execution of Bid Proposal**

A Bid Proposal, which is not signed by the individual making it, should have attached thereto a Power of Attorney evidencing authority to sign the Bid Proposal in the name of the person for whom it is signed.

A Bid Proposal, which is signed by a partnership, shall be signed by all of the partners or by an Attorney-in-Fact. If signed by an Attorney-in-Fact, there should be attached to the Bid a Power of Attorney evidencing authority to sign the Bid Proposal in the name of the partnership and such Power of Attorney shall be signed by all partners of the partnership.

A Bid Proposal, which is signed for a corporation, should have the correct corporate name thereof and the signature of the President, or other authorized officer(s) of the corporation, manually written below the corporate name and on the line indicating "By:_____." If such a Bid Proposal is manually signed by an officer other than the President of the corporation, a certified copy of a Resolution of the Board of Directors evidencing the authority of such officer(s) to sign the Bid Proposal should be attached thereto. Such a Bid Proposal should also bear the attested signature of the Secretary of the corporation and an impression of the corporate seal.

13. **Execution of Contract**

The successful Bidder to whom an award is made shall be required to enter into a written agreement, in the form attached hereto, within ten (10) days after receipt of a Notice of Award and copies of the documents to be executed. In the event the successful Bidder fails to comply with this provision, he/she may be considered by the Owner to have abandoned all his/her rights and interests in the award and his/her certified check or amount of the Bid Bond may be declared to be forfeited to the Owner, and the Contract may be awarded to another.

14. **Bidder Responsibility For Conditions of Work and Site**

The Bidder, or his/her representative, shall make personal investigation of the site of work and of existing structures and shall determine to his/her own satisfaction the conditions to be encountered, the nature of the ground, the difficulties involved in making connections to existing structures and pipes, and any and all other factors affecting the work proposed under the Contract.

The Bidder to whom the Contract is awarded shall not be entitled to any additional compensation by reason of conditions being different from those anticipated or by reason of his/her failure to fully acquaint himself/herself with the conditions at the site affecting the work of the Contract.

15. **Changes in Work**

If any change is required to be made in the work of the Contract, a payment adjustment therefore shall be determined as specified in Section 103 of the 2012 MDOT Standard Specifications for Construction.

ADMINISTRATIVE MEMO NO 8-78

Issued: October 10, 1978

Revised: June 21, 1989

Subject: **MINIMUM INSURANCE REQUIREMENTS FOR CONTRACTORS**

Summary Statement

The provision of adequate insurance by persons and businesses working for the city or on street right-of-way is essential to protect the public from the costs of injury or damage and to protect the city from unnecessary liability resulting from the acts of persons and businesses working for the city. Minimum insurance requirements are needed to provide this protection.

Memo

Persons or businesses which provide professional services to the city under the terms of a written contract or provide labor and/or material to accomplish work for the city or for others on or over street right-of-way or other city property shall carry insurance and bonds to protect the public and the City from exposure to unnecessary financial risks.

Prior to signing of contracts, issuance of purchase orders or permits, or other authorization to begin work, certificates of insurance evidencing the purchase of insurance in amounts not less than required by the Administrative memo or bid specifications, whichever is greater, shall be filed with City Clerk. Such certificates shall:

- a. Show that the insurance is currently in force and termination date of each policy.
- b. State the limits of liability of the policies covered by the certificate.
- c. Show that the City of Mt. Pleasant is to be specifically named in policy as an "additional insured" and should be issued to the City of Mt. Pleasant as the certificate holder.
- d. Provide that the City will receive not less than 10 days written notice of the cancellation of any listed policy.
- e. Be issued in the name of an insurance company authorized to conduct business in the State of Michigan.

Required bonds shall be filed with the City Clerk prior to the signing of contracts or other authorizations to proceed with work.

Insurance and bonds shall meet or exceed the following requirements. Exceptions to recognize more or less hazardous operations and financial risks should be considered and with approval of the City Manager may be made in specifications or contract requirements prior to awarding contracts or issuing purchase orders.

INSURANCE REQUIREMENTS

Type	Limit of Liability	Required of: City Contractor	Contractor On R-O-W
Worker's Compensation and Employer's Liability	Statutory Coverage B \$100,000	X	X
Public Liability (including products and completed operations liability)			
Bodily Injury	\$250,000 each person	X	X
	\$500,000 each accident	X	X
Property Damage	\$250,000 each accident	X	X
	\$250,000 each aggregate	X	X
Automobile Liability (including hired cars and automobile non-ownership)			
Bodily Injury	\$250,000 each person	X	X
	\$500,000 each occurrence	X	X
Property Damage	\$250,000 each accident	X	X
	\$250,000 each aggregate	X	X
Additional Insured Clause	City of Mt. Pleasant to be specifically named in policy as an "additional insured"	X	X
Excess Liability (Required unless risk occurrence is nominal)	\$1,000,000 each	X	

Persons or businesses engaged to provide labor and material in an amount in excess of \$10,000, or who will receive partial payments as work progresses will provide labor, performance and material bonds equal to the value of the work being performed. Such bonds are not required where the work to be done is of a type in which the failure to perform will not adversely affect the city's ability to function or increase the city's cost of completing the work.

**City of Mt. Pleasant, Michigan
2016 Water Main Project
BID PROPOSAL**

TO: City Hall/City Clerk
320 W. Broadway Street
Mt. Pleasant, MI 48858

BID DATE: February 16, 2016
TIME: 1:30 p.m.

The undersigned, as Bidder, hereby declares that his bid is made in good faith without fraud or collusion with any person or persons bidding on the same Contract; that he has carefully read and examined the Contract Documents, including the Notice to Bidders, Instructions, Bond Forms, Technical and Detailed Specifications, and Contract Drawings, for the designated work and understands all of the same; that he, or his representative, has made such a personal investigation at the site as is necessary to determine the character and difficulties attending the execution of the proposed work; and he proposes and agrees that if this Proposal is accepted, he will contract with the Owner in the form of the Contract hereto annexed, to provide necessary machinery, tools, apparatus and other means of construction, including utility and transportation services, necessary to do all the work and furnish all the materials and equipment specified or referred to in the Contract Documents, including Addenda No. __, __, and __, in the manner and time therein prescribed, and according to the requirements of the Owner as therein set forth to furnish Contractor Bonds and Insurance required of the Contractor by the Contract Documents, and that he will take in full payment therefore the unit prices set forth in the following Proposal.

The Bidder understands that the Owner reserves the right to reject any or all bids and to waive any irregularities in the bidding.

The Bidder agrees that his bid shall be good and may not be withdrawn for a period of sixty (60) calendar days after the scheduled closing time for receiving the bids.

Upon receipt of a written Notice of Award of the Bid, the Bidder shall execute the formal Contract Agreement attached hereto within ten (10) days and shall deliver to the Owner a Surety Bond or Bonds required. In the event the Contract and Bond are not executed within the time above set forth, the Bid Deposit attached in the sum of five percent (5%) of the Bid Proposal shall become the property of the Owner as liquidated damages for the delay and additional expense to the Owner caused thereby.

The Bidder hereby agrees to commence work under this Contract on or before the date to be specified in the written Notice to Proceed executed by the Owner and to fully complete the project as stipulated in the Special Conditions of these Specifications. The Bidder further agrees to pay as liquidated damages the sum indicated in the Special Conditions for each consecutive calendar day thereafter, until substantial completion, that is when all work items in the proposal are complete and notification of substantial completion of work items and final quantities is given to the Director of Public Works by the contractor.

The below unit prices shall include all labor, materials, overhead, profit, insurance, etc., to cover the finished work of the several kinds specified, and the Bidder agrees to perform all of the work described in the Specifications and/or shown on the Plans for the following unit prices:

BASE BID

DESCRIPTION	QTY	UNIT	UNIT PRICE	TOTAL COST
Preconstruction Audio/Video Recording	1	LS	\$	\$
Minor Traf Devices	1	LS	\$	\$
Sidewalk, Rem	2808	SFT	\$	\$
Curb, Rem	470	LFT	\$	\$
Pavt, Rem	335	SYD	\$	\$
Driveway, Rem	114	SYD	\$	\$
Water Valve, Rem	2	EA	\$	\$
Erosion Control, Inlet Protection, Filter Bag	9	EA	\$	\$
HMA, 13A	30	TON	\$	\$
HMA, 36A	21	TON	\$	\$
Driveway, Nonreinf, Conc, 6 Inch	114	SYD	\$	\$
Curb and Gutter, Conc, Det F4, Modified	470	LFT	\$	\$
Sidewalk Ramp, ADA	504	SFT	\$	\$
Sidewalk, Conc, 4 Inch	2212	SFT	\$	\$
Sidewalk, Conc, 6 inch	100	SFT	\$	\$
Detectable Warning Surface, Modified	10	LFT	\$	\$
Water Main, 8 Inch, Bored	972	LFT	\$	\$
Water Service – Long, 1 Inch	12	EA	\$	\$
Water Service – Short, 1 Inch	8	EA	\$	\$
Connect To Existing Water Main	3	EA	\$	\$
Water Valve, 8 Inch	2	EA	\$	\$
Water Main, Cut & Cap	4	EA	\$	\$
Tapping Sleeve and Valve 8x8	1	EA	\$	\$
Tapping Sleeve and Valve 8x6	1	EA	\$	\$
Restoration, Modified	9.72	STA	\$	\$
Materials Testing (Allowance)	1	LS	\$ 1,500.00	\$ 1,500.00
Contractor Staking	1	LS	\$	\$
BASE BID SUBTOTAL \$				

ADD ALTERNATE BID

DESCRIPTION	QTY	UNIT	UNIT PRICE	TOTAL COST
Preconstruction Audio/Video Recording	1	LS	\$	\$
Minor Traf Devices	1	LS	\$	\$
Sidewalk, Rem	624	SFT	\$	\$
Curb, Rem	146	LFT	\$	\$
Pavt, Rem	338	SYD	\$	\$
Brick Paver, Rem	92	SFT	\$	\$
Driveway, Rem	13	SYD	\$	\$
Water Valve, Rem	1	EA	\$	\$

Erosion Control, Inlet Protection, Filter Bag	9	EA	\$	\$
HMA, 13A	30	TON	\$	\$
HMA, 36A	22	TON	\$	\$
Driveway, Nonreinf, Conc, 6 Inch	13	SYD	\$	\$
Curb and Gutter, Conc, Det F4, Modified	146	LFT	\$	\$
Sidewalk Ramp, ADA	30	SFT	\$	\$
Sidewalk, Conc, 4 Inch	490	SFT	\$	\$
Sidewalk, Conc, 6 inch	100	SFT	\$	\$
Detectable Warning Surface, Modified	10	LFT	\$	\$
Brick Pavers	92	SFT	\$	\$
Water Valve, 6 Inch	1	EA	\$	\$
Water Valve, 8 Inch	2	EA	\$	\$
Hydrant Set	2	EA	\$	\$
Water Main, 8 Inch, Bored	1020	LFT	\$	\$
Water Service – Long, 1 Inch	10	EA	\$	\$
Water Service – Short, 1 Inch	6	EA	\$	\$
Connect To Existing Water Main	3	EA	\$	\$
Water Main, Cut & Cap	3	EA	\$	\$
Tapping Sleeve and Valve, 8x8	1	EA	\$	\$
Restoration, Modified	10.2	STA	\$	\$
Materials Testing (Allowance)	1	LS	\$ 1,500.00	\$ 1,500.00
Contractor Staking	1	LS	\$	\$
Add Alternate Bid Subtotal \$				
TOTAL BID \$				

Total Bid (written) _____ and ___/100 Dollars

RESPECTFULLY SUBMITTED:

Company Name _____

Address _____

City _____ ST _____ Zip Code _____

Area Code/Telephone Number _____ Fax _____

Email _____

Authorized Signature _____

Print of Type Name and Title _____

EXPERIENCE QUESTIONNAIRE

To be furnished by Bidder

The signatory of this proposal guarantees the truth and accuracy of all statements and of all answers hereinafter made.

1. How many years have you been in business as a contractor under your present name?

2. How many years have you been a principal officer of a firm under a different name?

Name of Firm _____

3. What projects of a similar nature has your organization contracted for within the past five years? (NOTE: Fill out each blank completely.)

Name of Owner & Location	Name/Address/ Phone# of person in Charge as Reference	Type of Work	Value of Work	Date Completed
1.				
2.				
3.				
4.				
5.				
6.				

**City of Mt. Pleasant, Michigan
2016 Water Main Project**

SUPPLEMENTAL SPECIFICATIONS

Construction Specifications

The work under this contract shall be completed following the 2012 MDOT Standard Specifications for Construction along with the City of Mt. Pleasant 2012 Standard Special Provisions, except as modified herein. This is not a state sponsored project; therefore, the payment of prevailing wages is not a requirement of this contract.

1. Time Constraints

Completion of this project within the time constraints described below is essential. The Contractor shall not begin work on the project before Aug 8, 2016. All work on this project shall be completed by Sept. 13, 2016 for the base bid and Sept. 30, 2016 should the Add Alternate bid be included.

2. Holidays

No work is to be scheduled by the contractor on Sundays, nor on the following holidays or holiday weekends:

Labor Day Weekend	9/3/2016 to 9/5/2016
-------------------	----------------------

3. Residential/Commercial Access

Access to driveways for local residents, schools, and businesses shall be maintained and available for use. All driveways shall be opened by the Contractor when the Contractor is not working, including all evenings, Sundays, and holidays, except as approved in writing by the Inspector and with written notification to the residents/owners. Contractor is to keep delivery access to businesses during hours of operation.

4. Additional Work By Contractor For Property Owner(s)

Any and all additional work between the contractor and property owner shall be handled and negotiated between the contractor and property owner. The city shall have no responsibility or liability for any additional construction.

5. Residential Refuse and Recyclable Collection

The City Contractor for trash (refuse) collection is Sunset Waste Services, (888) 707-3867, and recycling collection is MMI (989) 773-6918. Collection starts at 7:30 a.m. The Contractor shall schedule the work to allow and provide access for refuse and recycling Contractors to provide their services to the residential properties. If the refuse and recycling Contractors are unable to collect materials

2016 Water Main Project

due to construction operations, then the construction Contractor shall collect and dispose of the refuse and collect and deliver the recyclable material to the Material Recovery Facility (MRF) on River Road at no cost to the City. It is the responsibility of the construction Contractor to contact the refuse and recycling Contractors to coordinate operations.

6. Road Closure

Streets within 300 feet (one block) of construction operations may be closed only to through traffic. All other streets and intersections shall be open to all traffic and maintained in good driving condition by the Contractor at all times. Intersections shall be open to cross street traffic except when construction work is in progress in those intersections. No more than one intersection may be closed at a time.

7. Sidewalk Handicap Ramps

Handicap ramps shall be constructed following the 2012 MDOT Standard Specifications for Construction along with the City of Mt. Pleasant Special Provisions attached herein. Sidewalk handicap ramp construction shall also follow the latest ADA requirements

8. Audio-Video Recording

An aboveground audio-video recording of the construction area along and adjacent to the project meeting the requirements of the Special Provision for Preconstruction Audio-Video Recording is required. Deliver to DPW prior to mobilization.

9. Location Verification

The Contractor shall excavate, as the Contractor deems necessary, or at the direction of the Engineer, all points of the pipe connection or reconnection to verify the material, condition, location, alignment, and elevation prior to setting of manholes, valves, tees, or bends. The cost of this work and the temporary and permanent restoration thereof shall be included in the various unit prices for the project.

10. Concrete Removal

Sidewalk, concrete drives, and curb and gutter removal shall be to existing construction joints. Unbroken joints shall be saw cut prior to removal. If a saw cut can be made where the remaining section is undisturbed, unbroken or unjointed, and is five feet (5') in length at its least direction, then removal may be to that point.

11. Excavated Material

All excavated material, concrete, asphalt, broken pipe, and other material shall become the property of the Contractor for disposal, except as noted.

12. Tree Protection and Preservation

The Contractor shall protect and preserve trees within the construction area. If the Contractor causes tree damage resulting from non-compliance with the tree crossing detail, or if excessive damage occurs to the trunk or main limbs of a tree, the Contractor shall pay for the damages to the tree. The value of the tree shall be the amount appraised by the City's tree consultant. The Contractor shall also pay for the cost of removal in the event the damaged tree must be removed within a two-year period.

13. Truck Route Streets

The Contractor shall not allow any trucks, or equipment associated with this project to be driven on non-truck route City streets. The Contractor shall ensure that all trucks and equipment associated with the project travel only on streets identified as truck route streets on the Truck Route Map in the construction specification details. If any of the Contractors, the Contractors' subs, and/or suppliers, are seen driving on other City streets, the Contractor shall be required to pay for resurfacing the street with a polymer-modified asphalt approved by the City at a rate of application determined by the City.

14. Utility Location

The Contractor shall expose all existing utilities and services that will be crossed by proposed pipe. Utility locations and elevations, as shown on the plans, are approximations and shall be verified by the Contractor prior to beginning any work. The Contractor is required to call the MISS DIG system as noted in the Standard Construction Specifications.

15. Soil Borings

Should a bidder desire to make soil borings along the route, the Contractor making the borings shall first obtain a permit from Public Works. Insurance meeting the requirements of the City of Mt. Pleasant is required. The soil boring permit fee is \$25.00 per hole, and will be refunded if the results of the soil boring in the form of a soil-boring log are submitted to the City Engineer within one week after the close of bidding.

16. Insurance

The Contractor shall carry insurance that will provide for the full replacement cost of any property that is damaged during the project. The Contractor shall also pay the immediate costs of the homeowner/resident in the event an incident occurs, while waiting for the insurance company to make compensation. Immediate costs include but are not limited to: hotel/motel bills and meals if the building is unusable, costs for basic necessities such as beds or clothes in the event they are damaged.

17. Project Meetings

The Contractor shall attend weekly progress meetings with the Engineer to provide updates on the project, the schedule of work for the following week, and to resolve outstanding issues.

18. Signing and Barricading

Lighted barricades or barrels must adequately protect all excavations. Type I, Type II, or approved reflector zed barrels, shall be used at all excavations that will remain open overnight. Signing and barricading costs shall be borne by the contractor. The contractor shall provide the city with the telephone number of the signing company and the telephone number of a local contact person available during non-working hours to place or replace signs, signals, and barricades. One Hundred Dollars (\$100.00) shall be deducted from monies due to the contractor for each and every call requiring action by city forces for purposes of placing or replacing barricades and/or signing.

19. Sidewalk Grade Elevation

It is imperative that any continuous sections of sidewalk replacement be graded to allow water to drain both to the outside edge of the street side of the sidewalk and laterally to a driveway opening or perpendicular sidewalk connecting to the street. This may require raising either end of a continuous stretch of sidewalk to raise the grade to provide positive drainage. This may require the use of additional sand to elevate the sidewalk grade. The city will pay for all sand-compacted in-place by the cyd. The contractor shall stockpile sand at the DPW yard for use in this contract. All delivery tickets shall be given to the inspector upon delivery. For bidding purposes an estimated amount of sand shall be included in the proposal.

20. Damaged Sidewalk, Street or Driveways

Any damage occurring to adjacent sidewalk, streets, or driveways outside the limits of removal will be replaced at the contractor's expense, unless otherwise agreed upon prior to removal. It is recommended that sawcutting take place at limits of removal to minimize damage to adjacent structures. Any newly poured sidewalk is to be protected by the contractor. Any damage occurring to concrete sidewalks prior to curing will be replaced at the contractor's expense. The contractor should verify listed quantities prior to removal.

City of Mt. Pleasant
SPECIAL PROVISION
FOR
TECHNICAL SPECIFICATIONS

City of MtPleasant

1 of 1

January 15

GENERAL REQUIREMENT

The 2012 MDOT STANDARD SPECIFICATIONS FOR CONSTRUCTION shall govern all technical specifications of this contract. The following parts of the contract will prevail over all other parts in the following order:

- A. Special Provisions
- B. Supplemental Specifications
- C. Project Plans and Drawings
- D. City of Mt. Pleasant Standard Special Provisions
- E. MDOT Standard Plans
- F. MDOT Standard Specifications
- G. City of Mt. Pleasant Standard Construction Specifications

The Contractor shall not take advantage of any apparent error or omission in the contract documents. If any uncertainty, inconsistency, omission, or conflict is discovered in the contract documents, the Engineer will decide as to the true intent.

City of Mt. Pleasant

SPECIAL PROVISION
FOR

UTILITY COORDINATION

City of Mt Pleasant

1 of 2

January 16

The contractor shall cooperate and coordinate construction activities with the owners of utilities as stated in Section 104.08 of the 2012 MDOT Standard Specifications for Construction. In addition, for the protection of underground utilities, the contractor shall follow the requirements in Section 107.12 of the 2012 MDOT Standard Specifications for Construction. Contractor delay claims, resulting from a utility, will be determined based upon Section 109.05E of the 2012 MDOT Standard Specifications for Construction.

A) General

For protection of underground utilities, the Contractor shall call the Miss Dig system at (800) 482-7171 a minimum of three (3) working days prior to excavating. Members will thus be routinely notified. This does not relieve the Contractor of the responsibility of notifying utility owners who may not be a part of the Miss Dig alert system.

B) Coordination with Utilities

During the course of the construction, the Contractor will encounter both overhead and underground utilities. The contact information of the utility company representatives are as follows:

Consumers Energy - Electric
Richard Klender
1325 Wright Avenue
Alma, MI 48801
(517) 466-4279

Charter Communication – Cable TV
Jeff Price
915 E. Broomfield Rd.
Mt. Pleasant, MI 48858
(989) 621-4931

DTE Energy/MichCon – Gas
Dave Newcomb
609 Bjornson
Big Rapids, MI 49307
(231) 592-3244

City of Mt. Pleasant – Water, Sanitary &
Storm Sewer
Jason Moore
1303 N. Franklin Ave.
Mt. Pleasant, MI 48858
(989) 779-5405 or (989) 779-5401

Frontier – Telephone
Mark Marshall
345 Pine Street
Alma, MI 48801
(989) 463-0392

The Contractor's attention is directed to existing underground gas mains, which are located adjacent to or near the work. The Contractor shall use extreme care when working in these areas, and shall notify DTE Energy/MichCon Gas Company at least three (3) working days in advance before beginning any excavation in these areas.

CMU requires notification of new utility installations for the purpose of GPS/GIS locating.

C) Relocation

If Utility relocation work is anticipated for this project, contact the appropriate utility company immediately to coordinate relocations. This will minimize delays to the Contractor's operations due to utility work.

Owners of public or private utilities will not be required to relocate utilities in order to facilitate the operations of construction equipment, unless it is determined by the Engineer that such poles or structures constitute a hazard to the public or are extremely dangerous to the Contractor's operations.

City of Mt. Pleasant

SPECIAL PROVISION
FOR

DIRECTIONAL BORE WATER MAIN MATERIALS AND CONSTRUCTION

City of MtPleasant

1 of 6

January 15

A) Description

This Special Provision addresses the installation of water mains by guided boring, including connecting to existing water services or other water mains. All gate valve, gate well, and other appurtenances shall be installed using the Special Provision for Water System Materials and Construction. The Contractor will provide all labor, components, materials, tools and appurtenances necessary or proper for the performance and completion of the contract. Inspection and payment will be by the method stipulated in the contract.

Guided boring is a method of trenchless construction using a surface launched steerable drilling tool controlled from a mobile drilling frame, and includes a field power unit, mud mixing system and mobile spoils extraction system. The drilling frame differs from micro-tunneling, auger boring or pipe jacking equipment. The drilling frame is set back from an access pit that has been dug at the location of a proposed gate well (or other appurtenances), and a high-pressure fluid jet toolhead, that uses a mixture of bentonite clay and water, is launched and guided to the correct invert elevation and line required at the gate well. Using a real-time guidance system attached behind or within the toolhead, which measures inclination, roll, and azimuth, the toolhead is guided through the soil to create a pilot tunnel. Tunneling may also be performed between proposed gate wells or other appurtenances. Upon reaching the pit dug at the target location, the toolhead is removed and a reamer, with the product pipe attached, is joined to the arm swing and pulled back through the tunnel. A vacuum spoils extraction system removes any excess spoils generated during the installation. The gate wells are then completed at both locations and the surface restored to the original condition.

1) Qualifications

- i) Guided Boring Contractors shall have actively engaged in the installation of pipe using guided boring for a minimum of three years. The Contractor shall also have completed at least 5,000 feet of guided boring installations ranging from 6 inches to 24 inches in diameter, in the last year.
- ii) Field supervisory personnel employed by the Guided Boring Contractor will have at least three years' experience in the performance of this type of work.

2) Site Conditions

- i) Guided boring operations must not interfere with, interrupt or endanger the surface or activity upon the surface, and shall be located as called for on the project drawings.
- ii) Contractor must comply with all applicable jurisdictional codes and OSHA requirements.
- iii) When rock stratum, boulders, underground obstructions, or other soil conditions that impede the progress of drilling operations are encountered, the Contractor and Project Engineer will review the situation and jointly determine the feasibility of continuing drilling operations, by making adjustments or switching to an alternate construction method.

B) Materials

1) Pipe and Fittings

Restrained Joint PVC Pipe , fittings, and additional appurtenances used shall be in accordance with the Special Provision for Water System Materials and Construction.

2) Drilling Fluid

- i) Drilling fluid shall be a mixture of water and bentonite clay. The fluid shall be inert. The fluid should remain in the tunnel to ensure the stability of the tunnel, reduce drag on the pulled pipe, and provide backfill within the annulus of the pipe and tunnel.
- ii) Disposal of excess drilling fluid and spoils shall be the responsibility of the Contractor, who must comply with all relevant regulations, right-of-way, work space and permit agreements. Excess drilling fluid and spoils shall be disposed at an approved location. The Contractor is responsible for transporting all excess drilling fluid and spoils to the disposal site and paying any disposal costs. Excess drilling fluid and spoils shall be transported in a manner that prevents accidental spillage onto roadways. Excess drilling fluid and spoils will not be discharged into sanitary sewers, storm drain systems or waterways.
- iii) Drilling fluid returns (caused by fracturing or formations) at locations other than the entry and exit points shall be minimized. The Contractor shall immediately clean up any drilling fluid that surfaces through fracturing.
- iv) Mobile spoils removal equipment capable of quickly removing spoils from entry or exit pits and areas with returns caused by fracturing shall be present during guided boring operations to fulfill the requirements of paragraphs above.

- v) The Contractor shall be responsible for making provisions for a clean water supply for the mixing of drilling fluid. A permit to use water can be obtained from the Division of Public Works. No water may be taken from City fire hydrants. The Contractor shall be responsible for complying with all the requirements of that permit.

C) Construction

1) General

The Engineer must be notified immediately if any obstruction is encountered that stops forward progress of drilling operations. The Contractor and Engineer must review the situation and jointly determine the feasibility of continuing guided boring operations or switching to an alternative construction method. When it is determined that it is impossible to continue drilling operations, the Contractor will be directed how to proceed by the Project Engineer. Dewatering of pits and excavations must meet the general provisions and specifications for water main construction in effect at the City of Mt Pleasant. The type of dewatering method will be at the option of the Contractor. When water is encountered, the Contractor must provide a dewatering system of sufficient capacity to remove water, keeping any excavations free of water until the backfill operation is in progress. Dewatering shall be performed in a manner so that removal of soil particles is held to a minimum.

2) Preparation

Excavate required pits in accordance with the project drawings.

The drilling procedures and equipment shall provide protection to workers, particularly against electrical shock. As a minimum, grounding mats, grounded equipment, hot boots, hot gloves, safety glasses, and hard hats will be used by crewmembers. The drilling equipment shall have an alarm system capable of detecting electrical current. The Contractor is responsible for existing utilities, as stated under the Miss Dig System. All utilities that the boring operation may encounter shall be exposed to determine the actual depth and location. The costs of exposing utilities, whether shown on the plans or not, shall be the responsibility of the Contractor and included in the bid price for installing the new water main.

3) Guided Boring Operations

i) Equipment

- (1) The drilling equipment must be capable of placing the pipe within the planned line and grade.

- (2) The drilling equipment must have a minimum pullback rating of 35,000 lbs., a torque rating of 2,000 foot lbs., and mud flow of 24 gallons per minute.
- (3) The guidance system must have the capability of measuring inclination, roll and azimuth. The guidance system must have an independent means to ensure the accuracy of the installation. The Contractor shall demonstrate a viable method to eliminate accumulated error due to the inclinometer (pitch or accelerometer). The guidance system shall be capable of generating a plot of the borehole survey for the purpose of an as-built drawing. The guidance system must meet the following specifications.

Inclination:	Accuracy	0.06'
	Range	90°
	Repeatability	0.09
Roll:	Accuracy	0.1
	Range	0' to 360°
Azimuth:	Repeatability	0.1
	Range	0' TO 360°

4) Pilot Hole Boring

- i) The entry angle of the pilot hole and the boring process shall maintain a curvature that does not exceed the allowable bending radius of the product pipe.
- ii) Alignment Adjustments and Restarts
 - (1) The Contractor shall follow the pipeline alignment as shown on the drawings, within the specifications stated. If adjustments are required, the Contractor shall notify the Project Engineer for approval prior to making the adjustments.

(2) In the event of difficulties at any time during boring operations requiring the complete withdrawal from the tunnel, the Contractor will be allowed to withdraw and abandon the tunnel by completely filling the void and begin a second attempt at a location approved by the Project Engineer; or at the option of the Contractor and with the approval of the Engineer, the Contractor may excavate at the point of the difficulty and install the product pipe by trench method per the contract documents and technical specifications for construction. The number of access pits shall be kept to a minimum and the equipment must be capable of boring the following lengths in a single bore. The guided boring system shall have the capability of boring and installing 12-inch diameter and smaller water main in a continuous run without intermediate pits, for a minimum distance of 700 feet.

iii) Installing Product Pipe

(1) After the pilot hole is completed, the Contractor shall install a swivel to the reamer and commence pullback operations. Pre-reaming of the tunnel may be necessary and is at the option of the Contractor.

(2) Reaming diameter shall not exceed 1.4 times the diameter of the product pipe being installed.

(3) The product pipe being pulled into the tunnel shall be protected and supported so that it moves freely and is not damaged by stones and debris on the ground during installation.

(4) Pullback forces shall not exceed the allowable pulling forces for the product pipe.

(5) The Contractor shall allow sufficient length of product pipe to extend past the termination point to allow connections to adjacent pipe sections or gate valves. Pulled pipes shall be allowed 24 hours of stabilization prior to making tie-ins. The length of extra product pipe shall be at the Contractor's discretion and cost.

(6) The Contractor shall install a braided 12 gauge, blue in color, tracer wire at the same time as the product pipe. The tracer wire shall be connected to each hydrant at a bolt on the bottom of the hydrant barrel by use of a soldered connection, a crimped U-shaped connection, or a ring lug.

iv) Water Service Connections

Water service connections shall be made in accordance with the special provision for Water System Materials and Construction.

D) Testing

Testing shall be done in accordance with the special provision for Water System Materials and Construction.

E)

Measurement and Payment

Payment for the completed work for the various items shall be as described in the Special Provision for Water System Materials and Construction.

Contract Item (Pay Item)	Pay Unit
Water Main, __ inch Bored.....	Linear Foot
Water Service - Short, __inch, Bored.....	Each
Water Service - Long, __inch, Bored.....	Each

City of Mt. Pleasant

SPECIAL PROVISION
FOR

CURB AND GUTTER, CONC, DET F4

City of MtPleasant

1 of 1

January 15

A) Description

Install Curb and Gutter, Conc, Det F4, Modified according to this Special Provision and as shown on the plans.

B) Materials

The materials used for this work shall meet the requirements of Section 802.02 of the 2012 Standard Specifications for Construction.

C) Construction

Construct Curb and Gutter, Conc, Det F4, Modified in accordance with the requirements of Section 802 of the 2012 Standard Specifications for Construction. The material placed directly under the Curb and Gutter, Conc, Det F4, Modified shall be 22A aggregate, and shall be included in the bid price for Curb and Gutter, Conc, Det F4, Modified, as detailed on the proposed cross-section plan sheet. Thickness of this material shall be approximately 1.5 inches for local streets and 2.25 inches for major streets.

D) Measurement and Payment

The complete work as measured for Curb and Gutter, Conc, Det F4, Modified will be paid for at the contract unit price for the following contract pay items and includes all material, equipment, and labor to complete this item

Contract Item (Pay Item)

Pay Unit

Curb and Gutter, Conc, Det F4, Modified.....

Foot

City of Mt. Pleasant
SPECIAL PROVISION
FOR
DETECTABLE WARNING SURFACE, MODIFIED

City of MtPleasant

1 of 1

January 15

A) Description

This work shall be done in accordance with the requirements of Standard Plan R-28 series and Section 803 of the 2012 Standard Specifications for Construction except that the detectable warning plate shall be an asphalt dipped Cast Iron warning plate.

B) Materials

The detectable warning plate shall be an asphalt dipped Cast Iron warning plate meeting the requirements of section 803 of the 2012 Standard Specifications for Construction.

C) Construction

This work shall be done in accordance with the requirements of Standard Plan R-28 series and Section 803 of the 2012 Standard Specifications for Construction except that the detectable warning plate shall be an asphalt dipped Cast Iron warning plate.

D) Measurement and Payment

The complete work as measured for Detectable Warning Surface, Modified will be paid for at the contract unit price for the following contract pay items and includes all material, equipment, and labor to complete this item.

Contract Item (Pay Item)	Pay Unit
Detectable Warning Surface, Modified.....	Foot

City of Mt. Pleasant
SPECIAL PROVISION
FOR
MAINTAINING TRAFFIC

City of MtPleasant

1 of 3

January 15

A) Description

Traffic shall be maintained throughout the project according to sections 104.11 and 812 of the Michigan Department of Transportation 2012 Standard Specifications and as specified herein. The Contractor shall for the safety and protection of through and local traffic, furnish, erect, and maintain traffic control devices as shown on the plans and as directed by the Engineer. The Contractor shall remove the traffic control devices in a prompt, safe, and orderly manner upon completion of the work or when directed by the Engineer.

The Contractor shall maintain access to business and residential driveways at all times as described herein.

The Contractor shall notify the Engineer a minimum of 72 business hours prior to the implementation of any detours, street closures, or lane closures.

Traffic control elements, traffic control devices, barricade lighting, barricade spacing, taper lengths, etc., shall conform to the requirements of the 2005 edition of the Michigan Manual of Uniform Traffic Control Devices as amended, unless otherwise specified herein. This includes advance warning signs, barricades and channeling devices at intersecting streets, on which traffic is to be maintained.

The Contractor is required to contact all local and state police, fire, emergency services that have jurisdiction within the construction influence area a minimum of five (5) calendar days prior to the implementation of any lane closure or detours.

Changes and/or adjustments to the maintaining traffic plans and standards may be applied as determined by the Engineer.

1) Construction Influence Area (CIA)

The CIA shall include the right-of-way of the street where work is to take place from the beginning to the end of the construction signing and inclusive of all the construction signing on the intersecting streets & detours..

B) Materials

All traffic control devices and their usage shall conform to the 2005 edition of the Michigan Manual of Uniform Traffic Control Devices as amended, and as specified as herein.

Construction signing shall be required as shown in the Maintaining Traffic plan sheets.

Signs, barricades, and plastic drums shall be cleaned over the entire surface as required by the Engineer.

1) Temporary Signs

All signs must be approved by the Engineer prior to use.

All diamond-shaped warning signs shall be 48" x 48" mounted at a 7' minimum bottom height. Distances shown between construction warning, regulatory, and guide signs shown on the plans and typical are approximate and may require field adjustment, as directed by the Engineer. All temporary signs shall be constructed with legends and symbols flush to the sign's face and not extending beyond the sign borders or edges. Temporary warning, regulatory, and guide signs not required for a particular work Operation shall be removed, completely covered, or laid down with the legs off, as directed by the Engineer.

C) Construction

The contractor shall limit street excavation activities to 300 feet at a time. The contractor's backfill and aggregate base placement shall follow closely behind, such that no more than 300 feet of road shall be without existing pavement or a minimum of four (4) inches of compacted gravel on the sub-base.

D) Residential Access

Access to driveways for local residents and businesses shall be maintained and available for use. All driveways shall be open when the contractor is not working, including all evenings, nights, Sundays, and holidays except as approved in writing by the inspector and with written notifications to the residents/owners by the contractor.

Street Closures

Streets within 300 feet (one block) of construction operations may be closed only to through traffic. All other streets and intersections shall be open to all traffic and maintained in good driving condition by the contractor at all times. Intersections shall be open to cross street traffic except when construction work is in progress in those intersections. No more than one intersection may be closed at a time.

Residential Refuse and Recycling Collection

The city contractor for trash (refuse) is Republic Services/Allied Waste, 877-698-7274, and MMI Industries, 989-773-6918, for recycling. Collection begins at 7:30 a.m. The contractor shall schedule the work to allow and provide access for refuse and recycling contractors to provide their services to the residential properties. If the refuse and recycling contractors are unable to collect materials due to construction operations, then the construction contractor shall collect and deliver the refuse and recyclable material to a cross street for collection at no cost to the City. It is the responsibility of the construction contractor to contact the refuse and recycling contractors to coordinate operations.

E) Measurement and Payment

This work will be measured and paid as specified in section 403 & 802 of the Standard Specifications using the following contract items (pay items).

Contract Item (Pay Item)	Pay Unit
Barricade, Type III, High Intensity, Lighted, Furn.....	Each
Barricade, Type III, High Intensity, Lighted, Oper.....	Each
Minor Traf Devices.....	Lump Sum
Plastic Drum, High Intensity, Furn.....	Each
Plastic Drum, High Intensity, Oper.....	Each
Sign, Type B, Temp, Prismatic, Furn.....	Square Foot
Sign, Type B, Temp, Prismatic, Oper.....	Square Foot
Traffic Regulator Control.....	Lump Sum

City of Mt. Pleasant
SPECIAL PROVISION
FOR
PRECONSTRUCTION AUDIO VIDEO RECORDING

City of MtPleasant

1 of 4

January 15

A) Description

The work covered under this special provision consists of furnishing all labor, materials and equipment to provide High Definition color video recording along the entire length of the project to serve as a record of "original" conditions.

B) Equipment

All audio-video taping equipment shall be supplied and operated by a professional firm actively engaged in pre-construction audio-video recording.

C) Inspection

1) Requirements

Prior to commencing any other work, a continuous color audio-video recording shall be made of the project.

i) Coverage Area

Shall include all above ground features located within the zone of construction influence. Of particular concern are any existing faults, fractures, defects or other imperfections exhibited by any above ground features.

2) Qualifications

The audio-video and photography shall be performed by a professional, qualified, established audio-video recording firm knowledgeable in construction practices which have a minimum of one year of experience in the implementation of established inspection procedures.

3) Acceptance of Recording

The City reserves the right to reject the audio-video recording because of poor quality, unintelligible audio, or uncontrolled pan or zoom. Any recording rejected by the City shall be re-recorded at no cost to the City. Under no circumstances shall construction begin until the City has received and accepted the audio-video recording.

4) Equipment

When conventional wheeled vehicles are used for recording, the distance from the camera lens to the ground shall not be less than twelve (12) feet to insure proper perspective. In some instances, audio-video coverage will be required in areas not accessible on conventional wheeled vehicles. Such coverage shall be obtained by walking or special conveyance approved by the Engineer.

i) Audio-Video Recording Media

The audio-video recording provided shall be a color cassette utilizing the VHS format and shall be compatible with the City's tape player or in a DVD format.

ii) Camera(s)

A color video camera shall be used that shall have High Definition recording capability. The camera shall be a professional quality camera acceptable to the Engineer.

5) Execution

i) Audio

Each tape shall begin with the current date, project name, project number and municipality, and be followed by the general location; i.e. name of the street or location of "cross country" line, viewing side and direction of progress.

ii) Video

To preclude the possibility of tampering or editing in any manner, all video recordings shall, by electronic means, display continuously and simultaneously generated transparent digital information to include the date and time of recording, as well as the corresponding engineering stationing numbers. The date information will contain the month, day and year. For example, 3/16/01, and shall be placed directly below the time information. The time information shall consist of hours, minutes, and seconds, separated by colons. For example, 11:25:14. This transparent information shall appear on the extreme upper left-hand third of the screen.

(1) Engineering Station Numbers

Station numbers shall be continuous, accurate, correspond to the project stationing and include the standard engineering symbols (for example, 16+50). This information shall appear in the lower half of the viewing screen.

(2) Additional Information

Below the engineering stationing, periodic transparent alphanumeric information, consisting of the name of the project, name of the area covered, direction of travel, viewing side, etc., shall appear.

iii) Audio-Video Tracks

The audio-video recording shall consist of one (1) video and two (2) audio tracks, all of which shall be recorded simultaneously. All tracks shall consist of original, live recordings and, thus, shall not be copies of other audio or video recordings. Audio track 1 shall contain the narrative commentary of the camera operator, recorded simultaneously with his fixed elevation video record of the zone of influence of construction. Audio Track 2 shall contain the narrative commentary and evaluations of the ground level remote technician whose function shall be to provide a complete circumspection of any features not adequately visible to the camera operator and to describe in detail the extent of any damage encountered. In order to maintain viewer orientation, transition from fixed camera overview to remote camera picture shall be by means of an electronic dissolve.

iv) Lighting Requirements

All taping shall be done during times of good visibility. Auxiliary lighting may be required to fill in shadow areas and/or when recording inside a building. The lighting shall be sufficient to illuminate all details in the area. Lighting shall be required upon the request of the Engineer.

v) Recording Coverage

Recording coverage shall include all surface features located within the zone of influence of construction specified on the plans and supported by appropriate audio description. Audio description shall be made simultaneously with video coverage.

(1)Coverage

Video coverage shall include, but not be limited to, all existing driveways, sidewalks, curbs, ditches, streets (including condition of paving for full width), landscaping, trees, culverts, catch basins, manholes, headwalls, retaining walls, fences, visible utilities, and all buildings located within the zone of influence. Of particular concern are any existing faults, fractures, defects, or other imperfections exhibited by the above-mentioned surface features.

(2)Houses and Buildings

Structures shall be identified visually by house or building number, when possible, in such a manner that the progress of the tape and the proposed construction may be located by reference to the houses and buildings.

(3)General

Taping shall not be done during periods of visible precipitation or when more than 10% of the ground area is covered with snow, leaves, floodwaters or debris, unless otherwise authorized by the Engineer.

(4) Rate of Speed

The rate of speed in the general direction of travel of conveyance used during taping shall not exceed 48 feet per minute. Panning rates and zoom-in, zoom-out rates shall be controlled sufficiently such that the rates will produce clarity of the object viewed during playback of the tapes.

(5) Coverage Area

The Engineer shall have the authority to designate areas that may be omitted or added for audio-video coverage.

(6) Identification

(a) Tape Cassettes and Tape Cases

Cassettes and cases shall be properly identified by tape number, location and project name and municipality in a manner acceptable to the Engineer.

(b) Records

A record of the contents of each tape shall be supplied by a sheet identifying each segment of the tape by location; i.e. roll number, street or road viewing, tape counter number, viewing side, point starting from, traveling direction and ending destination point.

A) Measurement and Payment

The complete work as measured for Preconstruction Audio Video Taping will be paid for at the contract unit price for the following contract pay item and includes all material, equipment, and labor to complete the item.

Contract Item (Pay Item)	Pay Unit
Preconstruction Audio Video Recording.....	Lump Sum

City of Mt. Pleasant

SPECIAL PROVISION
FOR
INTERLOCKING CLAY UNIT PAVERS

City of MtPleasant

1 of 1

June, 2014

A) Description. This work consists of installing interlocking clay unit pavers (pavers) including base material, bedding and leveling material, joint paver filler, and all associated items to complete this work in its entirety. Complete this work in accordance with the standard specifications, except as modified in the details on the plans and in this special provision.

1. **Submittals:** Before starting this work, construct a 20 square foot (approximately) sample panel using bedding depth, materials, pattern, and joints shown on the plans. Construct the sample panel using the range of concrete paver color, texture, and workmanship, proposed for the work. Correct and rebuild sample panel until it is acceptable to the Engineer. This sample panel shall be constructed in a location of proposed work and shall be incorporated into the final product.

2. **Certification:** This work must be performed by workers with satisfactory record of performance on completed projects of comparable size and quality. Provide references to the Engineer if requested.

3. **Coordination:** Review installation procedures and coordinate this work with other contractors or subcontractors working in the area. Furnish and install temporary barricades and warning lights, as required, for public safety and protection of work. Protect adjacent work from damage, soiling, or staining during paving operations

B) Materials. Comply with Standard Specification for Construction and this special provision. Store granular materials in a well drained area on a solid surface to prevent mixing with foreign materials. Do not use frozen materials or materials mixed or coated with ice or frost.

1. Interlocking Clay Unit Pavers.

a. K&W Old Smokie Repressed Chamfered as manufactured by Glen-Gery Corporation. Conform to the requirements of ASTM C 902 Standard Specification for Light Traffic Paving Brick. The units shall have dimensions of 2¼" x 4" x 8".

b. Provide only sound units free of defects that could interfere with proper installation or reduce the life of the finished work. Minor cracks and minor chipping incidental to methods of manufacture or handling are subject to visual inspection and the Engineers acceptance. Excessive cracks and chips will be cause for rejection. There must be no efflorescence evident upon visual inspection of the pavers at the project site.

c. Provide manufacturers test data certification, according to the MDOT Quality Assurance Procedures Manual, documenting that the pavers meet these specifications when tested as specified in ASTM C902. Conduct freeze – thaw test not more that 12 months prior to delivery.

- d. Submit a minimum of five full-size samples for each paver color. Included the full range of style, size, exposed finish, color, and texture proposed for the work.
 - e. Protect Pavers from damage, chipping, and soiling during delivery and storage. Store off the ground on pallets or wood platforms. Do not use paving units with chips, cracks, voids, discoloration, or other visible defects.
2. Base Material – Use granular Class II granular material meeting section 902 of the Standard Specification for Construction.
 3. Bedding and Leveling Material – Use 2NS or 2SS granular material meeting section 902 of the Standard Specification for Construction.
 4. Paver Joint Filler – Use 2MS granular material meeting section 902 of the Standard Specification for Construction.
 5. Edge Restraint – Use EdgePro Paver Restraint manufactured by Dimex LLC, or approved equal.

C) Construction

1. **Construction.** Restrict pedestrian and vehicular traffic in the area during installation of pavers. Do not build on frozen, wet, saturated, or muddy sub-grade. Protect partially completed paving against weather damage when work is not in progress. Remove and replace completed work damaged by frost or freezing.

a. Bedding and Leveling Course. Spread bedding and leveling course materials evenly over the entire area to be paved, screed to a level that will provide a minimum 1-inch thickness when the pavers are placed and vibrated. Protect completed bedding and leveling course from damage until covered with paver units. Do not pre-compact bedding and leveling course.

b. Clay Pavers. Correct any unsatisfactory substrate or installation conditions prior to placing any paver units. Use full pavers wherever possible. Where cutting is required, use the largest size pavers possible. Cut pavers to provide required pattern and to neatly fit adjoining work. Cut pavers with block splitter or other equipment designed to cut masonry with clean, sharp, unchipped edges. Ragged cuts will not be accepted. Cut through the full thickness of the pavers.

Lay paver units in the pattern shown on the plans. Set all pavers flush to adjacent concrete curbs, sidewalks, and adjoining work. Maintain uniform 1/16-inch to 1/8-inch joints between pavers.

Vibrate pavers to final grade with three or more passes of a vibrating plate compactor. After the first pass, brush joint filler material over the surface and vibrate into the joints with additional passes. Completely fill joints. After final vibrating, the surface must be true to grade and not vary by more than 1/4-inch when tested with a 10-foot straightedge at any location on the surface.

Remove and replace pavers that are broken, chipped, stained, or otherwise damaged. Provide new matching units, install as specified and to minimize evidence of replacement. Clean pavers during installation and upon completion of the work. Repair damage to adjacent areas resulting from paver installation operations, as directed by the Engineer.

Remove and properly dispose of all unused materials, cutting remnants and other debris upon completion of the installation.

D) Measurement and Payment

The completed work will be measured and paid for at the contract unit price using the following pay items:

Contract Item (Pay Item)	Pay Unit
Unit Pavers	Square Foot

Unit Pavers includes all materials, labor, and equipment necessary to install the bedding material and pavers as described, including excavation.

City of Mt. Pleasant

SPECIAL PROVISION
FOR

WATER SYSTEM MATERIALS AND CONSTRUCTION

City of MtPleasant

1 of 16

January 16

A) Description

The Contractor shall furnish all labor, equipment, and materials to completely construct, test, and place in operation, the water system as shown on the drawings and specified herein.

B) Materials

1) Water Main Pipe

i) Ductile Iron Pipe

Ductile iron pipe shall meet the requirements of ANSI/AWWA C151/A21.51. Where these specifications differ with ANSI/AWWA C151/A21.51 these specifications will prevail.

Cement Mortar Lining - Cement mortar lining of pipe shall conform to ANSI/AWWA C104/A21.4. Care shall be taken to insure that no mortar remains in the joint surface of the bell. If mortar is found in the joint surface or lining, of greater thickness than allowed, the pipe will be returned.

Length of Pipe - The minimum nominal laying length of the pipe shall be eighteen feet (18'). A maximum of twenty percent (20%) of the total number of each size of an order may be furnished as much as twenty-four inches (24") shorter than the nominal laying length; an additional ten percent (10%) may be furnished as much as six inches (6") shorter than nominal laying length.

Pipe Thickness - Ductile iron pipe shall have a wall metal thickness as follows:

6-inch pipe	0.31 inch (Class 52)
8-inch pipe	0.33 inch (Class 52)
12-inch pipe	0.37 inch (Class 52)
16-inch pipe	0.37 inch (Class 51)
20-inch pipe	0.39 inch (Class 51)

Tolerances will be as allowed in ANSI/AWWA C151/A21.51. Pipe sizes not listed above will not be approved for use as main lines in the City water system.

Coating - The inside and outside of the pipe shall be coated with a bituminous coating of either coal-tar or asphalt base one mil. thick.

Independent Tests - The supplier shall furnish reports of all tests and inspections as required in the ANSI/AWWA C151/A21.51.

ii) Polyvinyl Chloride Pipe (PVC)

Polyvinyl chloride pipe (PVC) shall be of a class and designation as shown on the proposal, Plans and/or special conditions, with a SDR of 18 to 13.5 and compound designation Class No. 12454A, ASTM D-1784. PVC pipe shall be in accordance with current AWWA Standard C-900, meet the ANSI/NSF standard 14, and be blue in color. PVC pipe sizes six to twelve inches (6" - 12") in diameter shall be Class 150, and pipe sizes greater than twelve inches (12") shall be Class 200.

A single strand of 12 gauge insulated copper wire, blue in color, shall be buried in the trench twelve inches (12") above the PVC pipe. Solder all wire splices and wrap with "Scotch 2200 Vinyl Mastic Pads". The tracer wire shall be connected to each hydrant at a bolt on the bottom of the hydrant barrel by use of a soldered connection, a crimped U-shaped connection, or a ring lug.

iii) Restrained Joint PVC Pipe (RJPVC)

Restrained Joint PVC Pipe (RJPVC) shall use a Certa-Lok™ or approved equal joint restraint system. RJPVC shall meet the above requirements for Polyvinyl Chloride Pipe except that it shall be Class 235.

iv) Water Services

Allowable sizes are one inch, two inch, four inch (1", 2", 4"), or as specified for mains. Service saddles are required at each service connection on water main.

Material for four inch (4") shall be ductile iron or polyvinyl chloride, as specified for mains. Material for one inch (1") and two (2") shall be one of the following:

(1) Type K annealed seamless copper tubing conforming to ASTM B-88.

(2) One inch (1") shall be copper tube size, polyethylene (PE) water service pipe meeting AWWA C901 specifications. Markings on the pipe shall be AWWA C901, PE 3406, ASTM D-2737, dimension ratio SDR-9 brand name, date of manufacture, nominal size, sizing type (i.e., copper tube Size (CTS)), pressure rating 160 PSI at 73 1/2°F temperature, seal or (mark) of accuracy.

- (3) Two inch (2") shall be copper tube size, polyethylene (PE) water service pipe meeting AWWA C901 specifications. Markings on the pipe shall be AWWA C901, PE 3406, ASTM D-2737, dimension ratio 7, brand name, date of manufacture, nominal size, sizing type (i.e., copper tube size (CTS), pressure rating 200 PSI at 73 1/2°F temperature, seal or (mark) of accuracy.
- v) Joints
 - (1) Cast and Ductile Iron Pipe
 - (a) Mechanical - ANSI A21.11 or AWWA C111 with rubber gaskets.
 - (b) Push-on - ANSI A21.11 or AWWA C111 with thermite welded sockets and cable.
- vi) Fittings
 - (1) Cast Iron or Ductile Iron ANSI A21.10 or AWWA C110 or C153, 250 psi working pressure through twelve inches (12") and 150 psi above. Cutting-in sleeves, Clow Corporation #F 1220 or Traverse City Iron Works #A 847 M.
 - (2) All fittings are to be mechanical joint, including bends, tees, valves, hydrants. All fittings on new water main shall be Mega Lug fittings.
- vii) Valves
 - (1) Gate - AWWA C509, full resilient wedge, non-rising stem, mechanical joint, fully bronze mounted with roller and gear operator. Waterous Series 500 or Clow RW Valve or equal. Turn counter-clockwise to open.
 - (2) Butterfly - AWWA C504, Class 150-B, cast iron short body, cast iron disc, mechanical joint, worm gear traveling nut operator for direct burial allowed only for valves larger than sixteen inches (16"). Turn counterclockwise to open.
 - (3) Boxes - Three section cast iron with lid marked "WATER":
 - (a) Upper Section - Screw on adjoining center section and full diameter throughout.
 - (b) Center Section - Minimum five inch (5") inside diameter.
 - (c) Base Section - Fit over valve bonnet and shaped round for valves through ten inches (10") and oval for twelve inches (12") and over.

(4) Hydrants

- (a) Style - Break-away traffic model by East Jordan Iron Works, Model 5 – BR. AWWA C502, open clockwise.
- (b) Size - Hydrant with eight inch (8") I.D. barrel.
- (c) Inlet – six inch (6") diameter mechanical joint.
- (d) Drain - Tapped and plugged with brass plug.
- (e) Nozzles - National Standard Thread
 - (i) Two (2) 2-1/2 inch hose nozzles.
 - (ii) One (1) 4-1/2 inch pumper nozzle.
- (f) Operating nut and nozzle cap nuts to be 1-3/4 inch square.
- (g) Burial - six feet (6') minimum or as directed on the Plans or by the Engineer. The Contractor is to verify needed fire hydrant length to provide for 22 inch port height above the ground.
- (h) Conforming to City standards.

(5) Service Fittings

- (a) Unions will not be allowed between corporation stop and the curb stop. New services and the repair of existing services shall be made so that there will be a continuous, unbroken pipe between the corporation stop and the curb stop.
- (b) Service Saddles - Double-strap bronze or brass parts, AWWA CC threads. For PVC C900 pipe, use Ford S90 or approved equivalent.
- (c) Brass Corporation Stops [With CC (AWWA) threads]
 - (i) Ford - one inch (1") F600; Mueller – one inch (1") H15000 or approved equivalent.
 - (ii) Polyethylene Pipe - Use above specified corporations with adapter. Ford C 06-44.
 - (iii) For two inch (2") Services - Ford FB 1000, Mueller P-25008

- (d) Brass Curb Stops – two inch (2") Minneapolis pattern required.
 - (i) Ford Z22-333M, Z22-444M, Z44-777M, Mueller P25155 or approved equivalent. Polyethylene pipe will require a Ford C 06-44 adapter or equal.
- (e) Curb Stop Boxes - six feet (6') burial – two inch (2") Minneapolis tapped base with 1-1/4 inch upper section riser with pentagon brass nut in cap. Mueller H10300, Ford type PL or approved equivalent.

(6) Miscellaneous

- (a) Stainless Steel Tie Rods and Clamps - Clow Corp. or Traverse City Iron Works.
- (b) Plastic Seamless Encasement Tubing
 - (i) Material - ASTM D-1248 Polyethylene, Type III, Class C, eight (8) mils thick.
 - (ii) Closing Tape – two inches (2") wide Poly-Ken #900 or Scotchwrap #50.
- (c) Tapping Sleeves
 - (i) The tapping sleeve shall be a Ford Tapping sleeve, style FAST, with a stainless steel flange and rubber coat.
 - (ii) Stainless steel tapping sleeve shall not be allowed on water mains larger than 16 inches.
 - (iii) Full circle mechanical joint cast iron shall be required on water mains larger than 16 inches.
 - (iv) All tapping sleeves must be pressure tested to 150 psi before main is tapped.

(7) Shop Drawings and Material Inspection

- (a) The Contractor shall have the City Water Department Superintendent review shop drawings and all materials to be used on the City water system prior to installation.

C) Construction

1) Water Main

The installation, handling, and storage of all pipe and appurtenances shall be according to manufacturer's recommendations. Pipe shall, at all times, be protected against impact shocks and free fall. Stockpiling of pipe and appurtenances at the site shall be in such a location as to minimize handling and prevent collecting or submergence with water.

The depth of trench shall be such that the top of the pipe to be placed therein shall not be less than six feet (6') or more than seven feet (7') below the proposed finish grade. The depth shall be increased or decreased, if so shown on the Plans or so ordered by the Engineer. Depths shall be noted on the "As Built" Plans and Daily Inspection Reports. The trench shall be of such width as will readily permit the laying, handling and assembling of the pipes in the trench and to allow thorough filling and compacting of the earth backfill, adjacent to the lower half of the pipe. All hub holes shall be excavated to an extra width and depth to allow for proper examining of the pipe and shall provide a solid bearing for the pipe, practically its full length without refilling before the pipe is laid. Blocking of the pipe will not be allowed.

The trench bottom shall be undercut three to four-inches (3"-4") below the final location of the pipe and the trench then filled with Class II sand or crushed stone compacted with hand tampers to provide a cushion for bedding the pipe. The Contractor shall provide the sand or crushed stone from off the site, except when the trench passes through well-defined strata of sand or gravel.

Trenches for pipe shall be excavated so that there will be a minimum clearance of six inches (6") on each side of the barrel of the pipe and a maximum width of trench at the level of the top of the pipe, of not more than 16 inches greater than the OD of the pipe.

There shall be, at all times, a sufficient width to permit the pipe to be laid and to permit first-class construction methods to be used. Sufficient space shall be provided in the trench to permit the joint to be properly made.

Excavation for structures shall be extended sufficiently beyond the limits of the structure to provide ample room for placement and for other construction methods to be followed, wherever necessary.

In case soft material is encountered in the bottom of a trench or underneath a special structure, which, in the opinion of the Engineer, is not suitable for supporting the pipe or structure, the Engineer may order the removal of this soft material and its replacement with crushed stone, concrete or other material in order to make a suitable foundation for the construction of the pipe or structure.

After the pipe is laid, Class II sand, fine gravel or crushed stone shall be placed the entire width of the trench up to the spring line of the pipe. Backfill shall be carefully tamped under the haunches of the pipe. Additional sand, gravel or stone shall then be placed until the entire width of the trench is filled to not less than one foot (1') above the top of the pipe. Sand used for backfill around and over the pipe shall be thoroughly compacted with a vibratory compactor; hand compaction will not be acceptable.

The remainder of the backfilling may be done with acceptable material. All backfill, including pipe bedding, is to be compacted in maximum one-foot (1') lifts to a density of 95 percent of the maximum unit weight as determined by the modified proctor.

After the trench has been excavated as required, the pipe, fittings, valves and hydrants shall, after first being thoroughly inspected and the joints cleaned, be placed in the trench. All pipe fittings, and valves that will not be chlorinated with the new water main, shall be swabbed inside with five percent (5%) bleach (Sodium Hypochlorite) full strength before assembly and placement into the system. All pipe, fittings, valves and hydrants shall be carefully placed into the trench in such a manner as to prevent damage to them. Under no circumstances shall water main materials be dropped or dumped into the trench.

All lumps, blisters, and excess tar coating shall be removed from the bell and spigot ends of all ductile iron pipe and fittings. The outside of the spigot and the inside of the bell shall be wire-brushed and wiped clean before the pipe is laid.

Any damage to the exterior coating of the pipe shall be repaired with an approved coating before the pipe is laid. After placing a length of pipe in the trench, the spigot end shall be lubricated and then entered into the bell and the pipe pushed to the stop mark and brought to correct line and grade. Lubricants recommended by the pipe manufacturer and approved for use on a potable water system shall be applied as recommended. Due care should be used to seat the gasket evenly in the bell at all points.

The plain end of the slip type joint is furnished with a slight taper to ease its sliding fit with the gasket when the joint is made up. When necessary to cut pipe in the field, the outside of the cut end should be tapered by filing or grinding back about 1/8-inch at an angle of about 30 degrees with the centerline of the pipe.

Cutting pipe for inserting valves, fittings, etc., shall be performed in a neat workmanlike manner, without damage to the pipe or lining, and so as to leave a smooth end at right angles to the axis of the pipe.

Ductile Iron - Cutting shall be performed with a roller or shear type cutter for pipe sizes up to 20 inches in diameter. When machine cutting is not available for cutting pipe twenty 20 inches in diameter, or larger, electric arc cutting method will be permitted, using a carbon or steel rod. Only qualified, experienced workmen shall be used for this.

Asbestos-Cement or PVC Pipe - Cutting the pipe shall be performed by hand saw, abrasive discs or with a special asbestos-cement or PVC pipe cutting tool. All piping cutting tools must be of the true cutting variety. Under no circumstances is the pipe to be cut with a roller or shear type cutting tool.

If the trench contains any water, the open ends of the pipe shall be plugged with a water tight plug. A plug shall be used during any breaks in construction to prevent any possible contamination.

Whenever it is desirable to deflect the pipe in order to form a long-radius curve or to avoid obstructions, the pipe may be deflected within the tolerances recommended by the manufacturer and approved by the Engineer. No deflections in excess of those recommended by the manufacturer shall be allowed except by utilization of standard fittings as specified herein.

i) Valve and Hydrant Operation

No valves or fire hydrants on the existing system or new system, after it is in operation within the City system, shall be operated for any purpose by the Contractor without prior permission of the City Water Superintendent. Any unauthorized operation of said valves or fire hydrants shall result in a three hundred dollar (\$300.00) fine per incident.

ii) Notification Procedure for Scheduled Water main Shutdown

A 48 hour notification is required to the Water Department and to critical users, as identified below, all others require a 24 hour notification. Notification must be in writing stating the time of shutdown and length of time water is to be off. It shall be the responsibility of the Contractor to notify, in writing, all persons affected by any shutoff in accordance with the notification procedures.

Critical users are Central Michigan University, restaurants, beauty shops, hospitals, medical care facilities, nursing homes, schools, and commercial laundries.

iii) Shutdown of Water Mains

Water mains shall not be shutdown on Mondays, Saturdays, Sundays, or holidays, and/or one (1) day on either side of the holiday unless approved in advance by the Director of Public Works or Water Superintendent. From Tuesday through Friday, water mains shall be shutdown after 9:00 a.m. and are to be placed back into service before 4:30 p.m., after notification specified in the preceding paragraph. Notification must also be given to the City Water Superintendent and the Fire Department. The City has a water main shutdown procedure and checklist which are part of this specification by reference.

2) Valve Manholes

Valves twenty 20 inches or larger shall be installed in a valve manhole. All air release valves shall be in manholes. Details and materials of construction shall be as shown on the Plans and as specified for sanitary sewer manholes. The cover shall have "WATER" cast in the top.

3) Setting Valves and Boxes

All valves shall be set at a depth to the top of pipe, from a minimum of six feet (6') to a maximum of seven feet (7') below finished grade, with the stem in a vertical position and shall be plumb. The valve box shall be set so that it will not transmit shock or stress to the valve. It shall be centered over the stem nut of the valve and shall be true and plumb. The box shall be adjusted so that the cover is flush with the finished ground surface or as directed by the Engineer. Unless otherwise specified, a valve box shall be provided for every valve.

4) Setting Fire Hydrants

Fire hydrants shall be located as shown on the Plans, or as directed by the Engineer. All hydrants shall be set plumb and to a grade which will place center of the pumper nozzle above finished grade, (E.J.I.W. 22" above finished grade), unless otherwise directed by the Engineer. At no time shall the breakaway flange be below finished grade. Sufficient barrel extensions shall be furnished and installed by the Contractor to meet this requirement. Barrel extensions shall be installed such that the breakaway flange is located at finished grade level. Barrel extensions, if needed, shall be incidental to construction.

Each hydrant shall be connected to the main by a six inch (6") branch. A six inch (6") resilient wedge gate valve with box shall be installed with a valve depth of six feet (6') minimum to seven (7') feet maximum from finished grade to top of pipe, in each hydrant connection. The hydrant and valve shall be connected to the main line tee, as shown in the City standard detail, and the steamer port on the hydrant shall face the roadside.

5) Blocking

All bends, stub ends, plugs and any other portion of the system, which may be subject to separation of joints because of water pressure, shall be securely braced or blocked. Blocking shall be concrete blocks or concrete poured in place and shall be so placed as to prevent any movement of pipe or fitting joints due to water pressure. Shape of blocks shall be in accordance with the details shown on the Plans and within the following sizes:

Bearing Area in Square Feet Against Trench Wall in Sand

Pipe Size	Tees Plugs	Hydrants 90 deg. Els	45 deg. Els	22-1/2 deg. Els	11-1/4 deg. Els
4"	2		2	1	1
6"	3		3	2	1
8"	4		6	3	1
10"	7		9	5	2
12"	9		11	6	2
14"	11		15	8	3
16"	13		20	10	3
18"	16		25	12	4
20"	20		28	14	4
24"	28		40	20	6

OTHER SOIL CONDITIONS:

Cemented Sand or Hardpan	Multiply above by 0.5
Gravel	Multiply above by 0.7
Hard Dry Clay	Multiply above by 0.7
Soft Clay	Multiply above by 2.0

Muck - secure all fittings with tie rod clamps with concrete reaction backing, the same as listed for sand conditions.

6) Water Service Connection

- i) Water service connections shall not be made prior to the water main passing the bacteriological tests.
- ii) Water service materials must meet City specifications and be one inch (1") in size, unless specified otherwise.
- iii) Each service will consist of a saddle, corporation, piping, curb stop, and curb box.
- iv) Depth shall be a minimum of six feet (6') and a maximum of seven feet (7') of cover to the finished grade of the project or development.
- v) Curb boxes shall be adjusted to finished grade.
- vi) Curb boxes shall be fully screwed onto the curb stop valve.
- vii) Pipe must be beveled and lubricated with an approved lubricant for use on potable water systems.
- viii) Curb stops are to be installed so that the key top is parallel to curb, or proposed curb, when in the off position. (i.e. Flow is to be perpendicular to curb.) Curb boxes installed in concrete or bituminous areas shall be separated from the concrete or bituminous by the use of a length of four inches (4") PVC pipe.
- ix) The Contractor will check to see if existing curb stop is in the on or off position and leave new curb stop in same position. No curb stop valve will be turned on unless there is someone in the building to ensure there are no leaks
- x) Water services, if extended past the curb stop, shall be extended straight for a minimum of six feet (6') or past the right-of-way line perpendicular to the curb or proposed curblines.
- xi) Services are to be flushed prior to backfilling.
- xii) Taps are to be on the service side of the main.
- xiii) Taps shall be horizontal to five degrees above horizontal.
- xiv) Taps shall not be made within 24 inches of any corporation stop, valve, bend, tee, or joint.
- xv) Cookies must be given to the inspector at the time of tap.

7) Water Service Reconnections

- i) The City Water Department shall be notified of any iron pipe or lead pipe water services in use (pressurized).
- ii) Except for iron or lead pipes, all reconnections shall be of the same materials as the existing service and use brass fittings.
- iii) Where iron pipe or lead pipe water services are encountered, a new one inch (1") water service connection shall be constructed, in accordance with Sec. 8.03F, Water Service Connection above.
- iv) Reconnection shall include service saddle, corporation, and piping meeting City specifications.
- v) Taps shall be on the service side of the main.
- vi) Taps shall be horizontal to 5 degrees above horizontal. .
- vii) After reconnection is made and before the service line is pressurized, the water meter shall be removed, the line flushed, and the meter reinstalled. Any stopped water meters caused by reconnection will be charged to the Contractor on a time and material basis for repair and re-installation.

8) Live Taps

All service taps shall be made live taps, including chlorination and testing taps.

D) Testing and Sterilization

1) Pressure Testing

The Contractor shall furnish equipment for the test, and the test shall be run by him under the direction of the Engineer. The test shall be made at 150 pounds per square inch hydrostatic pressure, and shall be maintained for at least two (2) hours and the leakage shall not exceed 10.45 gallons per day, per inch diameter, per mile of pipe. The City will provide a certified gauge for the test. The Contractor shall furnish all labor and all additional equipment to make the test.

All valves shall be opened such that all air in the line can be removed upon filling with water. The Contractor shall install any corporation stops necessary to allow the air to be expelled. The main shall be filled at a velocity no greater than 1 foot per second. Flushing at a minimum velocity of 3 feet per second shall be preformed prior to starting any pressure testing.

The Contractor shall run a preliminary test to determine that all air has been expelled and to check for any leakage. If any leakage should exist, the Contractor shall make the necessary repairs and perform the preliminary testing until satisfactory results are obtained. The final test shall be made in the presence of the Engineer or Water Superintendent. If the test to be witnessed by the Engineer or Water Superintendent fails, the Contractor will be billed \$75.00 per hour with a \$150.00 minimum for the additional testing. The City will provide a certified gauge for the pressure test. The Contractor shall provide any additional equipment necessary to add and measure the water necessary to maintain the hydrostatic pressure within five pounds per square inch (5 psi) of the required test pressure for the duration of the test. If the City's gauge becomes damaged while in the Contractor's possession, the Contractor will be charged for the repair/replacement of the gauge.

When the testing period is complete, the Contractor shall add and measure the water to bring the final pressure reading to the initial pressure reading. The total gallons added during the duration of the test shall not exceed the allowable leakage.

2) Sterilization

Before the mains are chlorinated, they shall be thoroughly flushed. All mains shall be chlorinated for a period of twenty-four (24) hours. The Contractor shall furnish all necessary equipment and materials and the work shall be done under the direction of the City Engineer in accordance with all local and state health department regulations. Chlorine shall be added in sufficient quantity to give a 50 PPM residual of free chlorine after a twenty-four (24) hour period. Chlorine tablets shall not be used.

After completion of the chlorine procedure, the main shall be flushed and sampled, as per Michigan Department of Public Health requirements. The first sample shall be collected 24 hours after the chlorine has been flushed out of the main. Samples shall be taken from each end of the main with additional samples taken in order to maintain a minimum of 1 sample for each 1,200 feet of main. Sample shall also be taken at the end of each branch installed. The chlorinated water flushed from the main shall not be discharged to a storm sewer or open drainage way, that would result in discharge to surface water. The chlorinated water must be discharged to a sanitary sewer, held on site, or treated, until the chlorine is removed. All requirements of the Federal Clean Water Act (CWA) must be followed.

Two consecutive samples of water, 24 hours apart, shall be taken from the main by the Water Department for bacteriological tests, at a rate established by the DPW, per test. The first sample shall be taken 24 hours after chlorine has been flushed from the main. If the results of these tests indicate safe water, the main may be placed in service. If the tests should result in unsafe conditions, the chlorination shall be repeated by the Contractor. The Contractor shall be responsible for all costs associated with necessary retesting.

E) Measurement and Payment

1) Water Main, ___ inch

i) Description

The work of Water Main, ___ inch, Modified shall consist of excavation, the furnishing and placing of the complete water main (including all fittings, testing, concrete work, disinfecting, backfilling and removal of surplus excavated material), protection and replacement or repair of existing utilities and restoration of the surface to within four inches (4") of original grade. All work shall be done in accordance with the Plans and/or Specifications.

ii) Method of Measurement and Basis of Payment

Water Main, ___ inch, Modified will be measured in place by length in feet and will be paid for at the contract unit price which price shall be payment in full for any fittings, couplers, sheeting or shoring trench walls, backfill as required and all labor, material and equipment needed to accomplish this work.

2) Water Valve ___inch

i) Description

The work of Water Valve ___ inch, shall consist of excavation, the furnishing and placing of valves, valve manholes (inc. castings), and/or boxes, as applicable. All work shall be done in accordance with the Plans and/or Specifications.

ii) Method of Measurement and Basis of Payment

Water Valve ___ inch, will be paid for by the unit each, and shall include the valve box and/or valve manhole, and casting, as well as all labor, materials, and related work as described above.

3) Hydrant Set

i) Description

The work of Hydrant Set shall consist of furnishing and installing fire hydrant, an auxiliary valve, valve box, connecting piping, fittings, thrust block, barrel extension, drainage pit, and miscellaneous appurtenances. All work shall be done in accordance with the Plans and/or Specifications.

ii) Method of Measurement and Basis of Payment

Hydrant Set shall be paid for by the unit each, and shall include the auxiliary valve, valve box, connecting piping, fittings, thrust block, barrel extension, and miscellaneous appurtenances. All work shall be done in accordance with the Plans and/or Specifications.

4) Tapping Sleeve & Valve ___ inch by ___ inch

i) Description

The work of Tapping Sleeve & Valve ___ inch by ___ inch, shall consist of furnishing and installing tapping sleeves and valves on existing mains without loss of pressure in the existing main. It shall also include the installation of a valve box or manhole, as applicable. All work shall be done in accordance with the Plans and/or Specifications.

ii) Method of Measurement and Basis of Payment

Tapping Sleeve & Valve ___ inch by ___ inch shall be paid for by the unit each, and shall include the installation of a valve box or manhole, as applicable. There will be a time and materials charge by the City if main has to be de-pressurized to pull out cookie.

5) Water Service - (Short or Long), ___inch

i) Description

The work of Water Service - (Short or Long), ___inch, shall consist of excavation, furnishing and placement of sand backfill, removal of surplus excavated material, tapping the main, furnishing and installation of service clamp or saddle, corporation stops, curb stops, curb boxes, service pipe, and fittings to connect to existing service pipe, in accordance with the Specifications. Long-side service leads shall include crossing roads. Short-side service leads are those which do not cross roads.

- ii) Method of Measurement and Basis of Payment
 Water Service - (Short or Long), ___inch, shall be paid for by the unit each, and shall include tapping the main, furnishing and installation of service clamp or saddle, corporation stops, curb stops, curb boxes, service pipe, and fittings to connect to existing service pipe, in accordance with the Specifications.
- 6) Water Service Reconnection ___ inch
 - i) Description
 The work of Water Service Reconnection ___ inch, shall consist of excavation, furnishing and placement of sand backfill, removal of surplus excavated material, tapping the main, furnishing and installation of service clamp or saddle, corporation stops, service pipe from the main to the reconnection point between the main and the existing curb stop box, and fittings to connect to existing service pipe, in accordance with the Specifications.
 - ii) Method of Measurement and Basis of Payment
 Water Service Reconnection ___ inch, shall be paid for by the unit each, and shall include tapping the main, furnishing and installation of service clamp or saddle, corporation stops, service pipe, and fittings to connect to existing service pipe, in accordance with the Specifications

Contract Item (Pay Item)	Pay Unit
Water Main, ___ inch.....	Linear Foot
Water Valve ___inch.....	Each
Hydrant Set.....	Each
Tapping Sleeve & Valve ___ inch by ___ inch.....	Each
Water Service - (Short or Long), ___inch.....	Each
Water Service Reconnection ___ inch.....	Each
Water Valve, Rem.....	Each
Water Main, ___ inch Cut & Cap.....	Each

City of Mt. Pleasant
SPECIAL PROVISION
FOR
LINES, LEVELS, AND SURVEYS

City of Mt. Pleasant

1 of 1

December 2013

Staking is by the Contractor. The contractor shall carefully preserve all benchmarks, reference points, grade stakes, and other necessary control points and be held responsible for all errors that may result from their loss or disturbances.

City of Mt. Pleasant
SPECIAL PROVISION
FOR
RESTORATION, MODIFIED

City of MtPleasant

January 16

A) Description

This work shall include all labor, materials and equipment to clean up and restore public and private ground to a condition equal to or better than that which existed prior to construction. This includes removal and legal disposal of all construction debris, litter, and materials.

B) Materials

1) Topsoil

Black dirt or natural surface soil, high in organic material, free from stones, brush, debris, objectionable weeds, or other litter, and approved by the City Engineer prior to spreading. The engineer may perform a soil test prior to approval. Peat material is not acceptable.

2) Fertilizer

Fertilizer shall be commercial seed starting 20-10-10 grade supplied in the manufacturer's packaging with composition clearly marked. Bulk fertilizer may be used when certified delivery slips are furnished by the Contractor, meeting section 816 of the 2012 MDOT specifications.

3) Seed

Seed material and application shall meet section 816 of the 2012 MDOT specifications, using TUF seed mixture.

4) Mulch and Adhesive

Mulch and adhesives shall meet section 816 of the 2012 MDOT specifications, for wood fiber mulch. Paper mulch or straw are not acceptable.

C) Construction

1) Preparation of Seed Bed

i) Grading

Grades on areas to be seeded shall be maintained in a true and even condition. Where the grades are not defined, they shall be established by the Contractor to blend with existing adjacent grades without irregularities and shall provide for proper drainage.

ii) Placing Topsoil

Topsoil shall be evenly spread by blade graders, or other approved methods, to a minimum depth of four inches (4"). Any irregularities in the surface resulting from topsoiling or other operations shall be corrected in order to prevent the formation of depressions where water will stand. Topsoil shall not be placed until the subgrade has been smoothly graded and compacted, and the engineer or inspector approves the subgrade in writing.

iii) Application of Fertilizer

Fertilizer shall meet the requirements of section 812 of the 2012 MDOT specifications for Class A fertilizer.

iv) Cleanup

After completion of the above operations, the surface shall be cleared of stones, roots, brush, wire, grade stakes, and other objects that might be a hindrance to maintenance operations.

2) Seeding

TUF seed mixture meeting requirements of section 816 of the 2012 MDOT specifications shall be used on all lawn areas and adjacent backslopes. No seeding shall be done until the Engineer has inspected the seed container and has given written approval of the topsoil. Seeding for erosion control measures shall be cereal rye seed.

3) Mulching

i) Straw and Hay Mulch

As part of the seeding and fertilizing operations, wood fiber mulch shall be spread over the surface as required in section 816 of the 2012 MDOT specifications. Paper mulch is not acceptable.

ii) Mulch Adhesive

Mulch shall be held in place by a spray coating of mulch adhesive. The Contractor shall protect all traffic, signs, structures, and other objects from being marked or disfigured by the adhesive material. Fire hydrants shall be covered prior to the placement of all sprayed materials. Adhesive material shall be applied uniformly at a rate of 400 gallons per acre, sprayed simultaneously with the mulch, or a surface application of adhesive sprayed immediately following mulching.

4) Establishment of Seeded Areas

The Contractor shall be responsible for the proper care of the seeded area during the period when the grass is becoming established, and shall be responsible for a total grass cover. The acceptance of the work will not be given until grass cover is established.

i) Watering

Seeded areas shall be watered whenever excessive drying is evident during the period set for establishment of the seeded area. The Contractor shall be responsible for the proper care of the seeded areas and for the establishment of a uniform stand of grass until final acceptance of the entire work covered by the Contract.

The City has established a program to encourage residents to water the newly seeded areas, to help establish the lawn. Residents will be given a credit on their water bill for watering the newly seeded areas.

ii) Weeds

After the grass has become established, if it appears to have more than ten percent (10%) weeds, the Contractor shall spray with an approved herbicide (weed killer).

D) Measurement and Payment

Restoration, Modified shall be paid for by the square station as measured along the project centerline and will include all work necessary to restore both sides of the street. The price paid shall be payment in full for all Restoration, Modified work.

Contract Item (Pay Item)

Pay Unit

Restoration, Modified..... Station

DPW Policy for replacing private items and systems in the public right-of-way, resulting from construction damage or street and utility maintenance.

Structures, walkways, and decorative paving and pillars (including mailboxes) in the right-of-way will be replaced with functionally and aesthetically similar structures, if damaged during construction or street, sidewalk, and utility repair. Curb cuts for service walks and driveways where the drive does not exist will not be replaced. Structures in the path of street or sidewalk construction will not be replaced. Fences will not be put back up in the right-of-way.


The City of Mt. Pleasant will give advance notice asking residents to move or mark their underground irrigation systems. If sprinklers are marked, or contractors are notified of sprinklers being present, and they are damaged, the contractor will pay for the damage (except as outlined below). If not marked and the contractor is not notified of the presence of underground irrigation systems, or if no building permit was taken out at installation, the City will not pay for damage. If the City repairs a sprinkler system, they will confirm backflow prevention is in place.

Landscaping and plantings will be spared as much as practicable, but will not be replaced at the City's expense. The City will give at least one week's notice to residents to allow time to move plantings.

On state roads where structures and private paving in the right-of-way are not repaired or replaced as a result of construction damage, (MDOT rule), the City will contract for repairs and replacements outside the road contract, within the restrictions listed above.

When installing sidewalks, the DPW will accommodate residents to a reasonable extent to move sidewalks out of the normal sidewalk path to save trees and to allow extra driveway parking. The DPW will have final discretion as to which trees to cut for sidewalk installation. If there is no obstruction and no issue other than the resident wants the sidewalk to take a different path, the City will not accommodate the resident.

City of Mt. Pleasant Truck Route Map

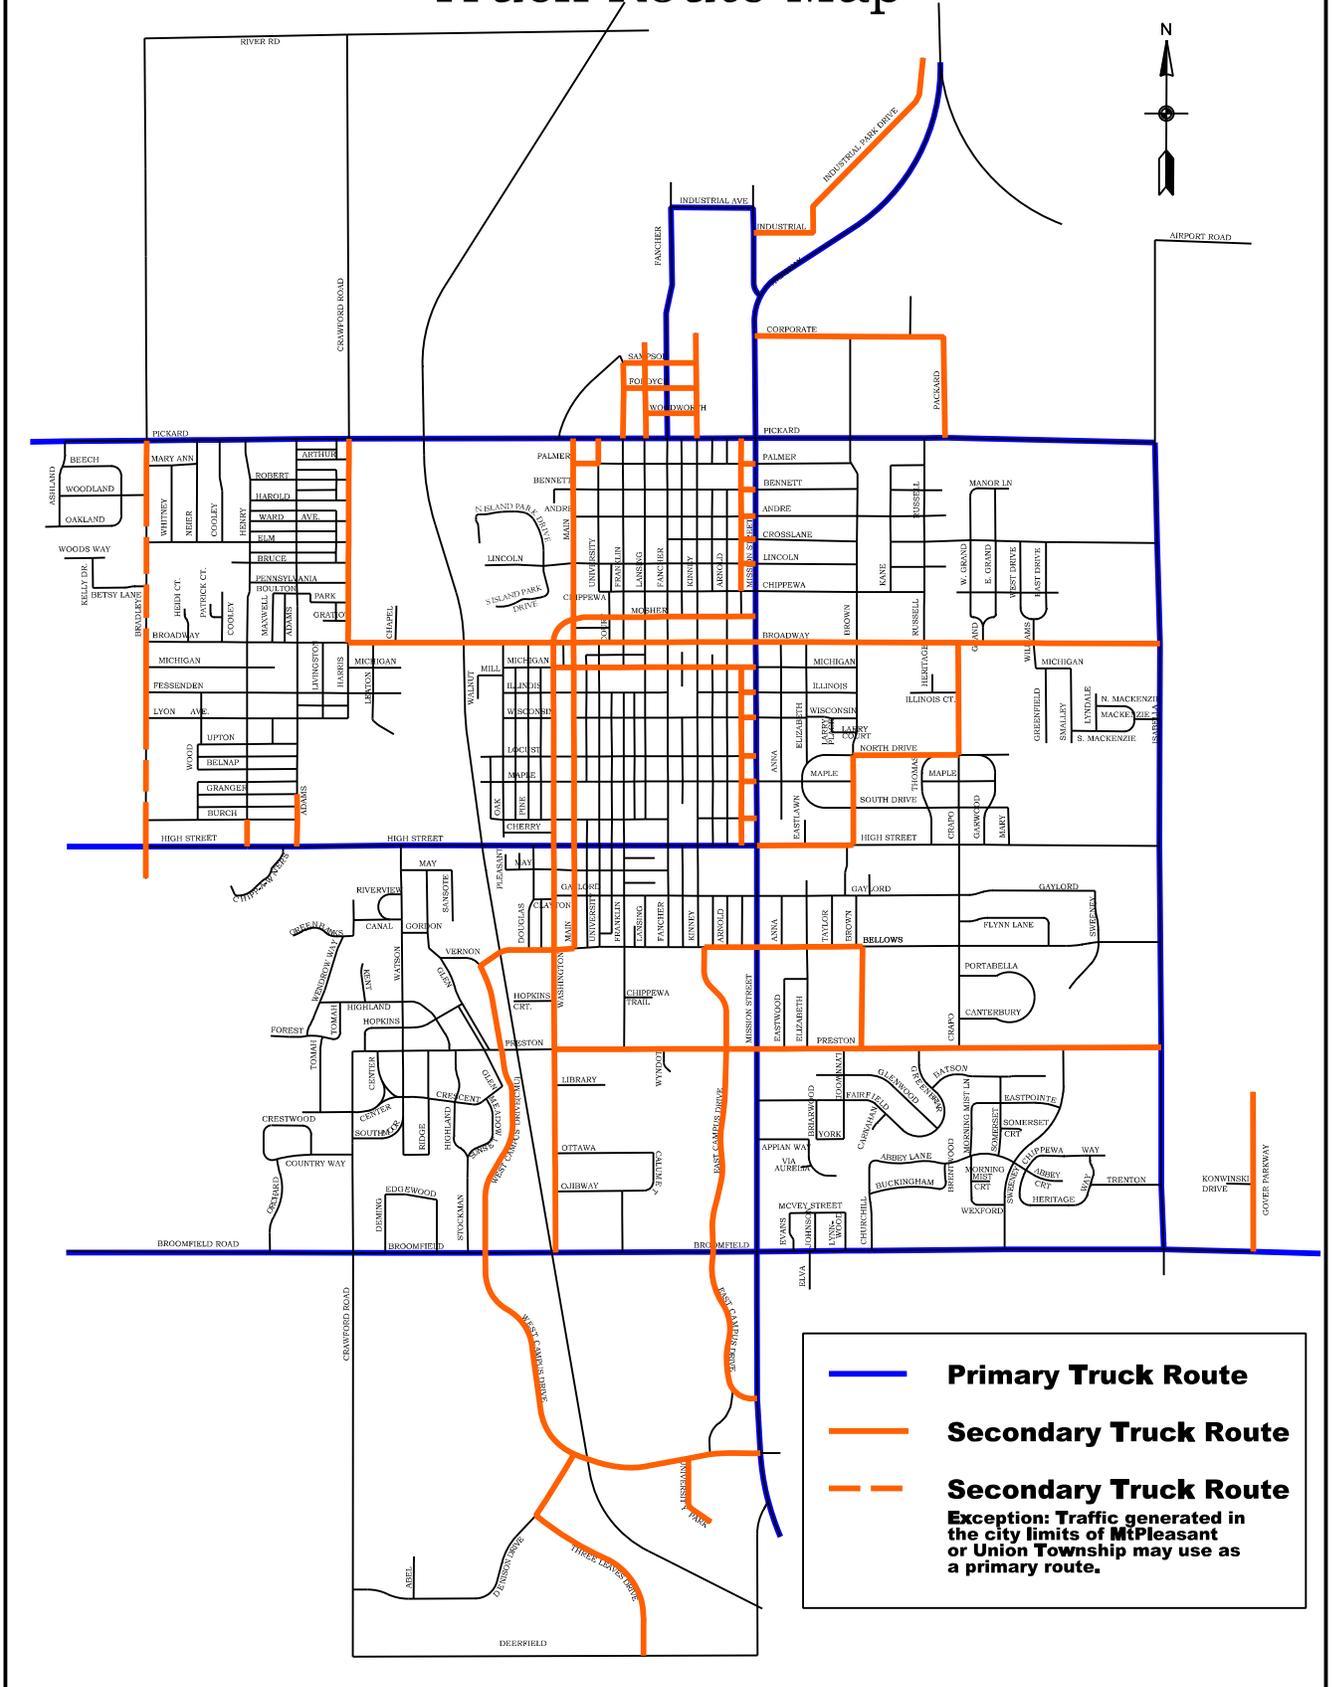

CITY OF MT. PLEASANT DIVISION OF PUBLIC WORKS

2016 WATER MAIN PROJECT

THE IMPROVEMENTS COVERED BY THESE PLANS SHALL BE DONE IN ACCORDANCE WITH THE MICHIGAN DEPARTMENT OF TRANSPORTATION 2012 STANDARD SPECIFICATIONS AND SUPPLEMENTAL SPECIFICATIONS.

THE PROPOSED IMPROVEMENTS COVERED BY THESE PLANS ARE IN ACCORDANCE WITH THE AASHTO; A POLICY ON GEOMETRIC DESIGN OF HIGHWAYS AND STREETS, 2004, & 2005 MMUTCD.

MISS DIG: CALL TOLL FREE 1-800-482-7171 MINIMUM OF THREE WORKING DAYS BEFORE STARTING THIS PROJECT, OR ANY DIGGING.

UTILITIES:
THE FOLLOWING UTILITIES ARE LOCATED IN OR NEAR THE RIGHT-OF-WAY OF THIS PROJECT.

	OWNER	CONTACT
GAS	DTE/MICHCON 609 BJORNSON BIG RAPIDS, MI 49307	LARRY BOURKE (231) 349-2364 (CELL) (231) 592-3244 (DESK)
ELECTRIC	CONSUMERS ENERGY 1325 WRIGHT AVENUE ALMA, MI 48801	RICHARD KLENDER (989) 466-4279
TELEPHONE	FRONTIER COMMUNICATION 345 PINE STREET ALMA, MI 48801	MARK MARSHALL (989) 463-0392
CABLE	CHARTER COMMUNICATION 915 E. BROOMFIELD RD. MT. PLEASANT, MI 48858	JEFF PRICE (989) 773-7090
SEWER & WATER	CITY OF MT. PLEASANT 1303 N. FRANKLIN ST. MT. PLEASANT, MI 48858	JASON MOORE (989) 779-5405

INDEX

1. COVER SHEET
2. DETAIL SHEET
3. REMOVAL
4. PLAN STREET
5. PLAN SHEET
6. SOIL EROSION KEY SHEET

THIS PROJECT IS TO BE CONSTRUCTED TO 2012 MDOT STANDARD SPECIFICATIONS FOR CONSTRUCTION



PROJECT LOCATION

MAYOR
KATHLEEN LING
VICE MAYOR
ALLISON QUAST-LENTZ
COMMISSIONERS
LORI GILLIS
JIM HOLTON
TONY KULICK
CITY MANAGER
NANCY RIDLEY
DIRECTOR OF PUBLIC WORKS
JOHN ZANG

NICHOLAS MADAJ
MIKE VERLEGER



CITY OF MOUNT PLEASANT
DIVISION OF PUBLIC WORKS
1303 N. FRANKLIN ST.
MT. PLEASANT, MICHIGAN 48858
(989)-779-5401
WWW.MT-PLEASANT.ORG

COVER SHEET 2016 WATER MAIN PROJECT

DESIGN BY: BB	CONSTRUCTED
DRAWN BY: BB	DATE OF PLAN: JAN 2016
CHECKED BY: ST	SCALE: NONE
APPROVED BY: JZ	SHEET 1 OF 6 SHEETS
REVISIONS	DATE/INITIALS

CONTROL SECT.	JOB NO.	FED. PROJECT	FED. ITEM NO.
PLOT DATE:			

CALL MISS DIG
BEFORE DIGGING UNDERGROUND OR
WORKING NEAR OVERHEAD WIRES,
CALL MISS DIG AT LEAST 3 BUSINESS
DAYS IN ADVANCE OF STARTING YOUR
PROJECT. (800) 482-7171
IT'S THE LAW

DRAWING PATH:

FED. ITEM NO.

FED. PROJECT:


JOB NO.:

CONTROL SECTION:

2016 WATER MAIN PROJECT

GENERAL CONSTRUCTION NOTES


1. MOBILIZATION, TRAFFIC CONTROL, TESTING AND ALL OTHER WORK NECESSARY TO COMPLETE THE WORK SHOWN ON THE PLANS AND SPECIFICATIONS ARE INCIDENTAL TO THE UNIT PRICES LISTED ON THE BID PROPOSAL AND WILL NOT BE PAID FOR SEPARATELY.
2. CONTRACTOR TO MAINTAIN DRIVEWAY ACCESS EVERY NIGHT, AND THROUGH THE WEEKEND.
3. CONTRACTOR TO INSTALL BARRICADES PRIOR TO REMOVALS.
4. CONTRACTOR TO VERIFY EXISTING SITE CONDITIONS AND UTILITY DEPTHS PRIOR TO CONSTRUCTION.
5. CONTRACTOR TO PROTECT EXISTING TREES AND POLES.
6. CONTRACTOR TO MAINTAIN SOIL EROSION CONTROL MEASURES UNTIL SEEDING IS ESTABLISHED.
7. CONTRACTOR TO VERIFY EXISTING SEWER INVERTS PRIOR TO CONSTRUCTION.
8. THE DEPTH OF WATER SERVICES AND WATER MAIN SHALL BE A MINIMUM OF 6 FEET. IN THE EVENT OF A CONFLICT WITH ANOTHER UTILITY, THE WATER SERVICE AND WATER MAIN SHALL BE A MINIMUM OF 18" BELOW THE CONFLICTING UTILITY.
9. ALL PAVEMENT, CURB AND SIDEWALK REMOVALS SHALL BE SAW CUT. PAYMENT INCLUDED IN REMOVAL ITEMS.
10. CONTRACTOR RESPONSIBLE FOR PLUGGED WATER METERS.
11. ALL WATER SHUTDOWNS, INCLUDING SERVICE CHANGE OVER, REQUIRE 24 HOUR NOTICE TO RESIDENTS BEING EFFECTED, 48 HOURS FOR BUSINESSES.
12. ALL WATER SERVICES TO BE REPLACED WITH MATERIAL MEETING THE CITY OF MT. PLEASANT SPECIFICATIONS. WATER SERVICE RE-ROUTES SHALL BE INCLUDED IN WATER SERVICE UNIT PRICE. WATER CURB STOPS AND BOXES SHALL BE INCLUDED IN WATER SERVICE UNIT PRICE.
13. ALL STORM INLETS SHALL BE PROTECTED FROM SEDIMENT DURING THE CONSTRUCTION PROCESS UNTIL ADEQUATE STABILIZATION OF DISTURBED AREAS.
14. CONTRACTOR MUST WORK WITHIN ROAD RIGHT-OF-WAY. SHOULD THE NEED ARISE TO DO WORK OUTSIDE OF THE RIGHT-OF-WAY, THE CONTRACTOR IS RESPONSIBLE FOR GETTING PERMISSION FROM THE PROPERTY OWNER, IN WRITING, AND REPAIR ALL DAMAGE AS A RESULT OF CONSTRUCTION.
15. PROTECT ALL EXISTING STORM AND SANITARY STRUCTURES.
16. PLACE CRUSHED STONE, MEETING MANUFACTURER SPECS, AT ALL PROPOSED UTILITY CROSSINGS. INCLUDED IN PAYMENT FOR PIPE.
17. ALL WATER SERVICES SHALL BE INSTALLED PERPENDICULAR TO ROADWAY.
18. SHOULD WATER SERVICE SHUT OFF BOX BE INSTALLED IN A CONCRETE AREA, A PVC SLEEVE SHALL BE INSTALLED AROUND THE SHUTOFF BOX (INCIDENTAL TO PAY ITEMS LISTED ON THE BID FORM).

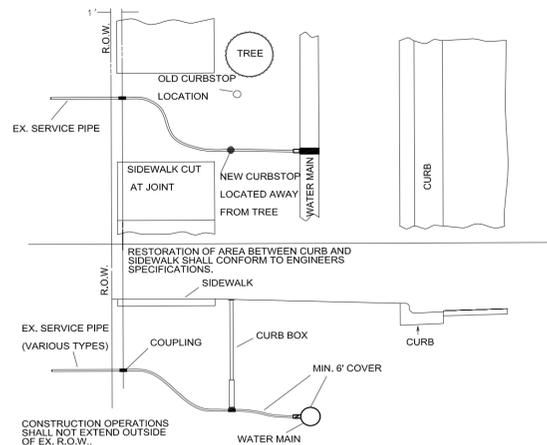

- NOTE:
- CURBS AND GUTTER SHALL BE REMOVED FROM JOINT TO JOINT AS A MINIMUM AND SHALL BE REPLACED BY CONTRACTOR.
 - EACH SERVICE TO SERVE ONLY ONE HOUSE.
 - WATER SERVICE PIPE SHALL BE OF TYPE AND SIZE SPECIFIED IN THE CITY OF MT. PLEASANT STANDARD SPECIFICATION BOOK.
 - THE METHOD OF EXCAVATION, PLACING OF PIPE, JOINTING, TESTING, AND BACK FILLING SHALL CONFORM TO THE REQUIREMENTS OF THE DIVISION OF PUBLIC WORKS.
 - NO WORK SHALL BEGIN WITHOUT FIRST RECEIVING A WRITTEN PERMIT FROM THE D.P.W.
 - NO WATER SERVICE SHALL BE COVERED UNTIL AFTER IT HAS BEEN INSPECTED AND APPROVED BY AUTHORIZED PERSONNEL OF THE D.P.W. (24 HOUR NOTICE REQUIRED).
 - PROPERTY DISTURBED DURING REPLACEMENT SHALL BE RESTORED TO PREVIOUS OR BETTER CONDITION.
 - ALL SERVICES SHALL BE PERPENDICULAR BETWEEN TAPPING LOCATION AND CURB STOP.

CITY OF MT. PLEASANT-TYPICAL WATER SERVICE RE-CONNECTION


NO SCALE

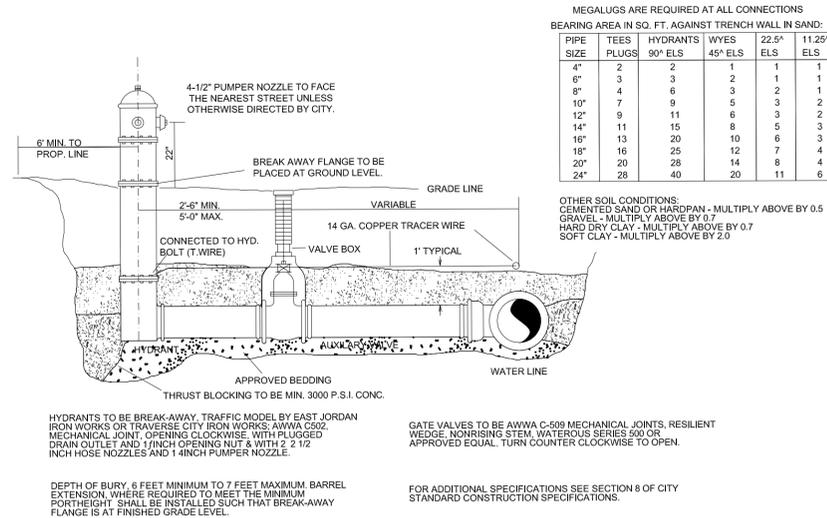

CITY OF MT. PLEASANT -- TYPICAL FIRE HYDRANT & VALVE LOCATION


NO SCALE

2 HOUR PVC WATER MAIN TEST ALLOWABLE LEAKAGE

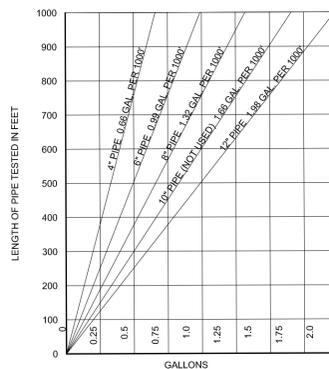


AS DIRECTED BY ENGINEER IF EXISTING WATER MAIN HAS LESS THAN STANDARD COVER

- NOTES:
- BASE FOR INSULATION TO BE LEVELED AND COMPACTED TO PREVENT CRACKING AND BREAKING OF THE INSULATION.
 - INSULATION TO CONSIST OF (2) 2" SHEETS OF STYROFOAM 40 HIGH LOAD BRAND FOAM NON-ABSORBANT INSULATION.
 - JOINTS TO BE OVERLAPPED BY TOP LAYER OF INSULATION.
 - INSULATE WATERMANS AS SHOWN ON PLAN OR AS DIRECTED BY THE ENGINEER.

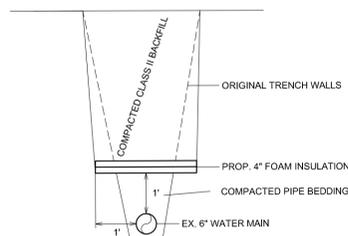


CITY OF MT. PLEASANT - OPEN CUT WATER MAIN INSULATING DETAIL

NO SCALE

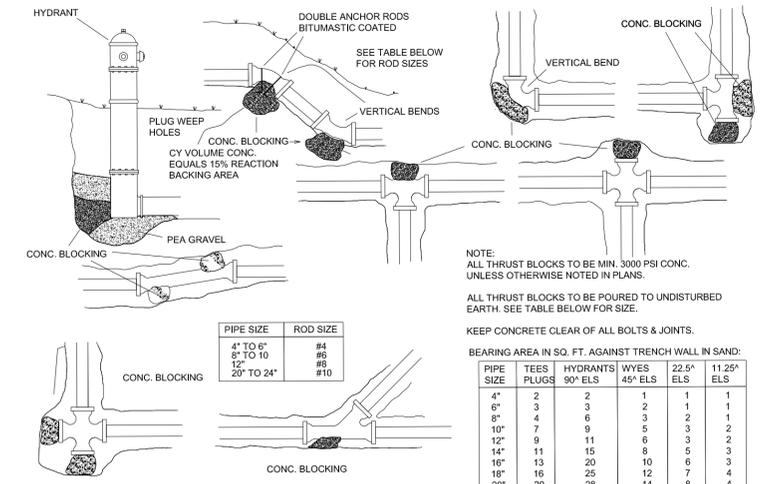


CITY OF MT. PLEASANT -- TYPICAL LOCATION OF THRUST BLOCKS

NO SCALE

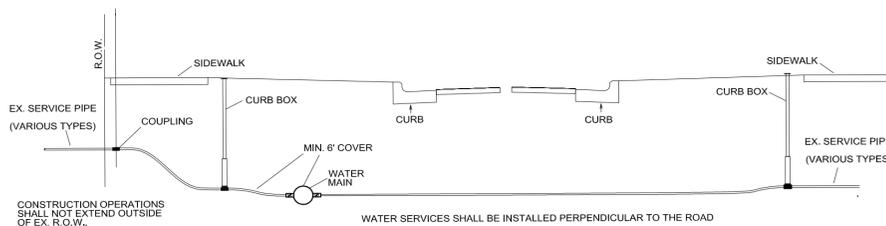


CITY OF MT. PLEASANT-TYPICAL CURB BOX LOCATION

NO SCALE

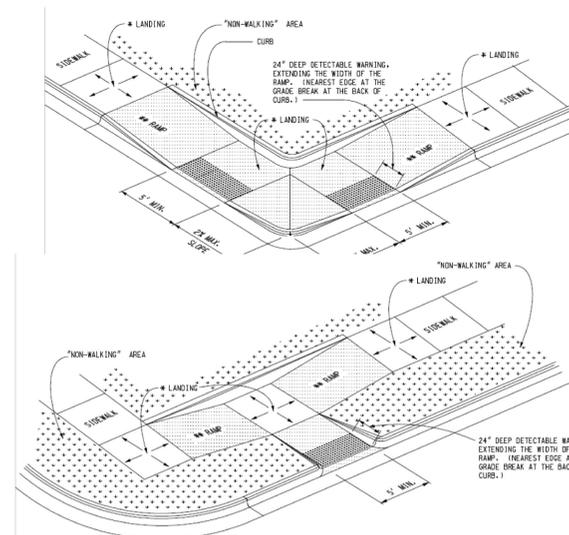

TYPICAL ADA RAMP DETAIL

NTS

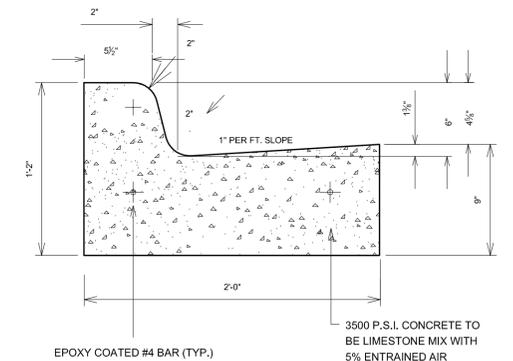

CURB AND GUTTER DETAIL

NTS



CITY OF MOUNT PLEASANT
DIVISION OF PUBLIC WORKS
1303 N. FRANKLIN ST.
MT. PLEASANT, MICHIGAN 48858
(989)-779-5401
WWW.MT-PLEASANT.ORG



**NOTE/DETAIL SHEET
2016 WATER MAIN PROJECT**

DESIGN BY BB	CONSTRUCTED
DRAWN BY BB	DATE OF PLAN JAN. 2016
CHECKED BY ST	SCALE NONE
APPROVED BY JZ	SHEET 2 OF 6 SHEETS

REVISIONS _____ DATE/INITIALS _____

CONTROL SECT.	JOB NO.	FED. PROJECT	FED. ITEM NO.
---------------	---------	--------------	---------------

PLOT DATE:

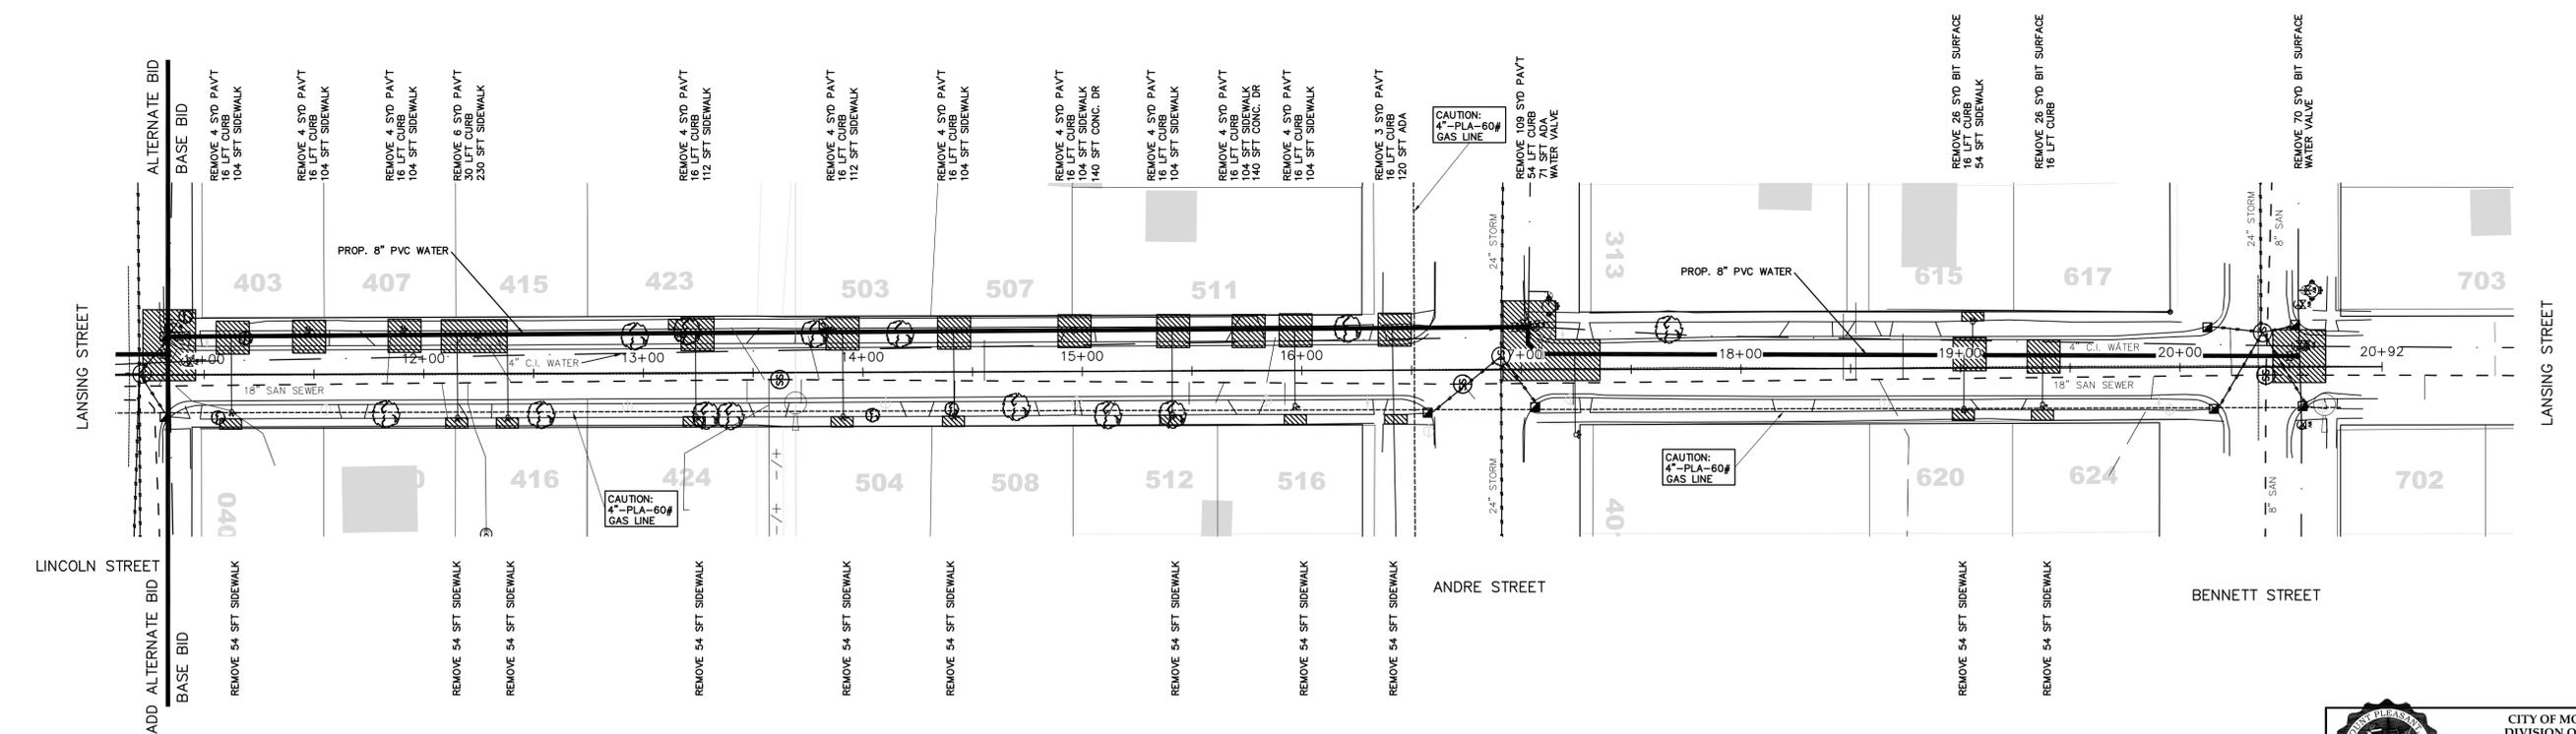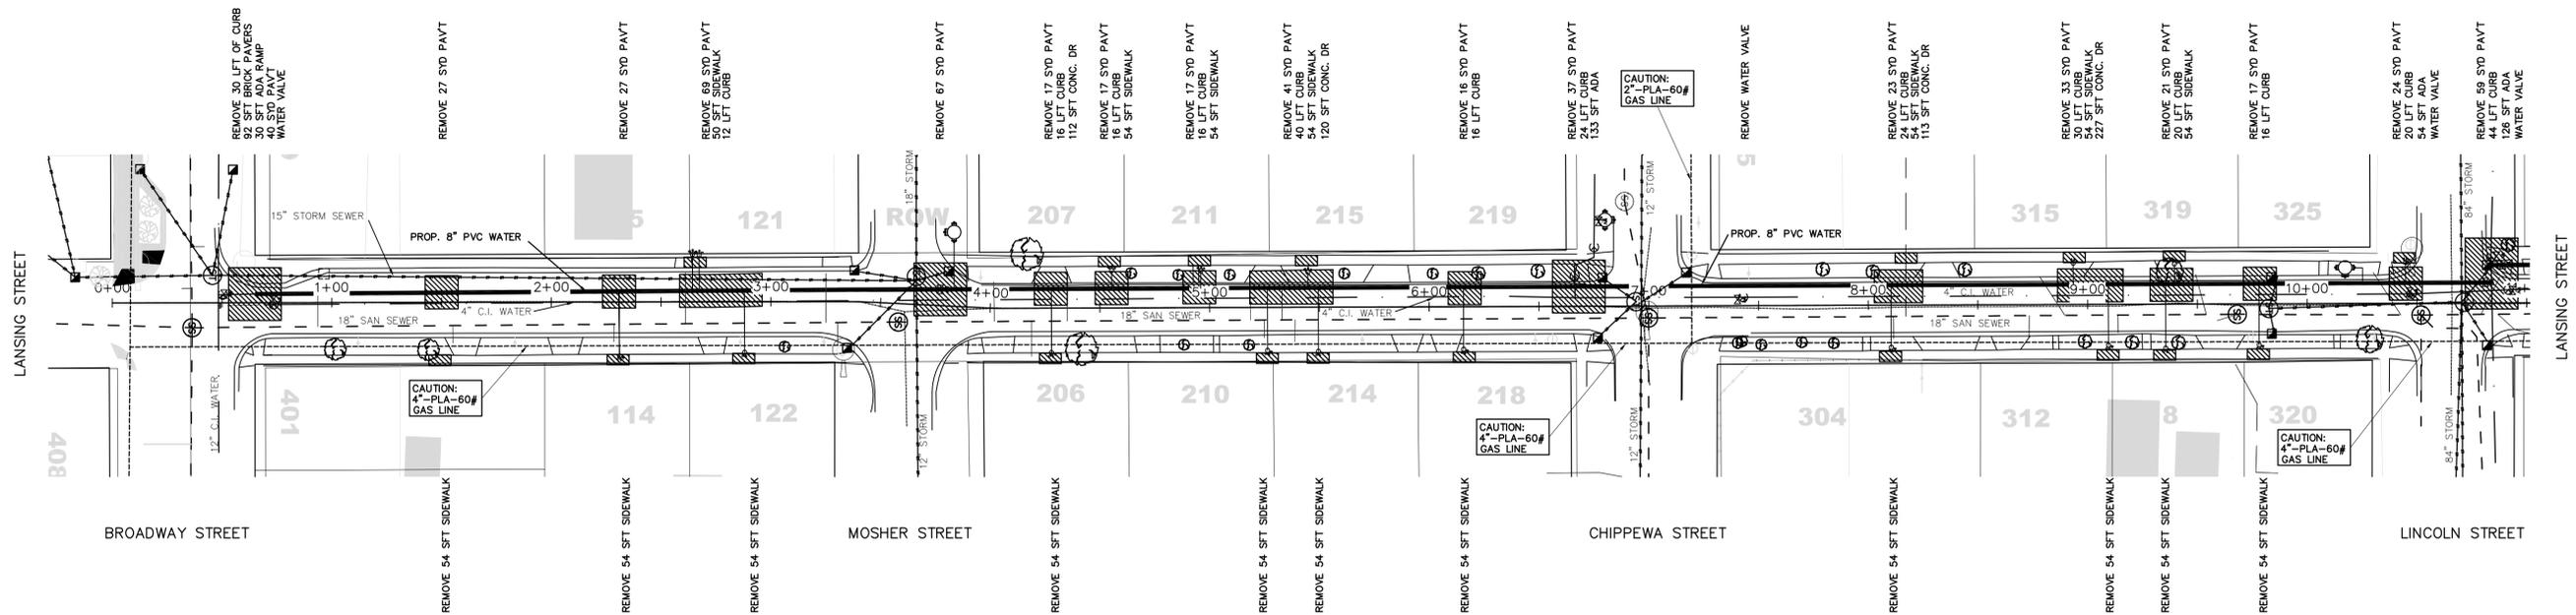

REMOVE AND REPLACE QUANTITIES BASE BID:


Pavt, Rem	335 SYD
Curb, Rem	470 LFT
Sidewalk, Rem	2808 SFT
Driveway, Rem	114 SFT
Water Valve, Rem	2 EA
HMA, 13A	30 TON
HMA, 36A	21 TON
Driveway, Nonreinf, Conc. 6 Inch	470 SYD
Curb and Gutter, Conc, Det F4, Modified	114 LFT
Sidewalk Ramp, ADA	504 SFT
Sidewalk, Conc, 4 Inch	2212 SFT
Sidewalk, Conc, 6 Inch	100 SFT
Detectable Warning Surface, Modified	10 LFT

REMOVE AND REPLACE QUANTITIES ADD ALTERNATE BID:

Pavt, Rem	338 SYD
Curb, Rem	146 LFT
Brick Paver, Rem	92 SFT
Sidewalk, Rem	624 SFT
Driveway, Rem	13 SYD
Water Valve, Rem	1 EA
HMA, 13A	30 TON
HMA, 36A	22 TON
Driveway, Nonreinf, Conc. 6 Inch	13 SYD
Curb and Gutter, Conc, Det F4, Modified	146 LFT
Sidewalk Ramp, ADA	30 SFT
Sidewalk, Conc, 4 Inch	490 SFT
Sidewalk, Conc, 6 Inch	100 SFT
Detectable Warning Surface, Modified	10 LFT
Brick Pavers	92 SFT

- LEGEND**
- ⊕ SANITARY MANHOLE
 - ⊕ STORM MANHOLE
 - ⊕ TREE
 - ⊕ WATER SHUT OFF VALVE
 - ⊕ FIRE HYDRANT
 - ⊕ CURB STOP
 - ⊕ CATCH BASIN
 - ⊕ TRAFFIC CONTROL SIGN
 - ⊕ LIGHT POLE
 - ⊕ SOIL EROSION KEY NUMBER
 - ▭ REMOVE AND REPLACE

CALL MISS DIG
 BEFORE DIGGING UNDERGROUND OR
 WORKING NEAR OVERHEAD WIRES,
 CALL MISS DIG AT LEAST 3 BUSINESS
 DAYS IN ADVANCE OF STARTING YOUR
 PROJECT. (800) 482-7171
IT'S THE LAW

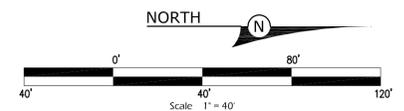




CITY OF MOUNT PLEASANT
 DIVISION OF PUBLIC WORKS
 1303 N. FRANKLIN ST.
 MT. PLEASANT, MICHIGAN 48858
 (989)-779-5401
 WWW.MT-PLEASANT.ORG

REMOVAL SHEET
2016 WATER MAIN PROJECT





DESIGN BY BB DRAWN BY BB CHECKED BY JT APPROVED BY JZ	CONSTRUCTED DATE OF PLAN: JAN. 2016 SCALE: 1" = 40' SHEET 3 OF 6 SHEETS		
REVISIONS _____ DATE/INITIALS _____			
CONTROL SECT.	JOB NO.	FED. PROJECT	FED. ITEM NO.
PLOT DATE: _____			

DRAWING PATH: _____ FED. ITEM NO. _____ JOB NO. _____ CONTROL SECTION: LOCAL _____ 2015 LOCAL STREET RECONSTRUCTION

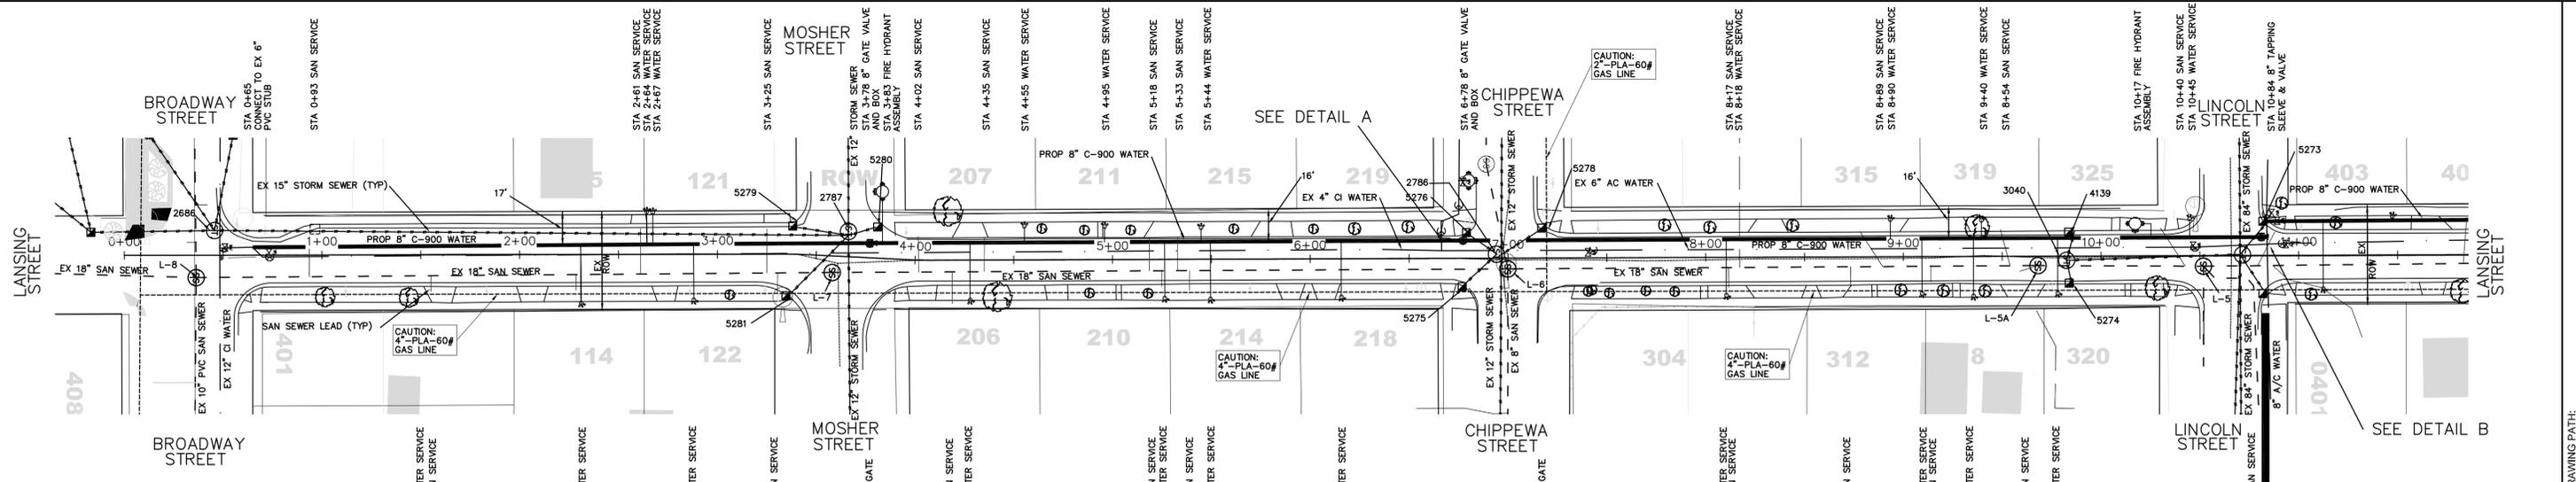

ADD ALTERNATE BID QUANTITIES

Water Main, 8 Inch, Bored	1020 LFT
Water Valve, 6 Inch	1 EA
Water Valve, 8 Inch	2 EA
Tapping Sleeve and Valve, 8x8	1 EA
Hydrant Set	2 EA
Water Service - Short, 1 Inch	6 EA
Water Service - Long, 1 Inch	10 EA
Water Main Cut and Cap	3 EA
Restoration	10.2 STA

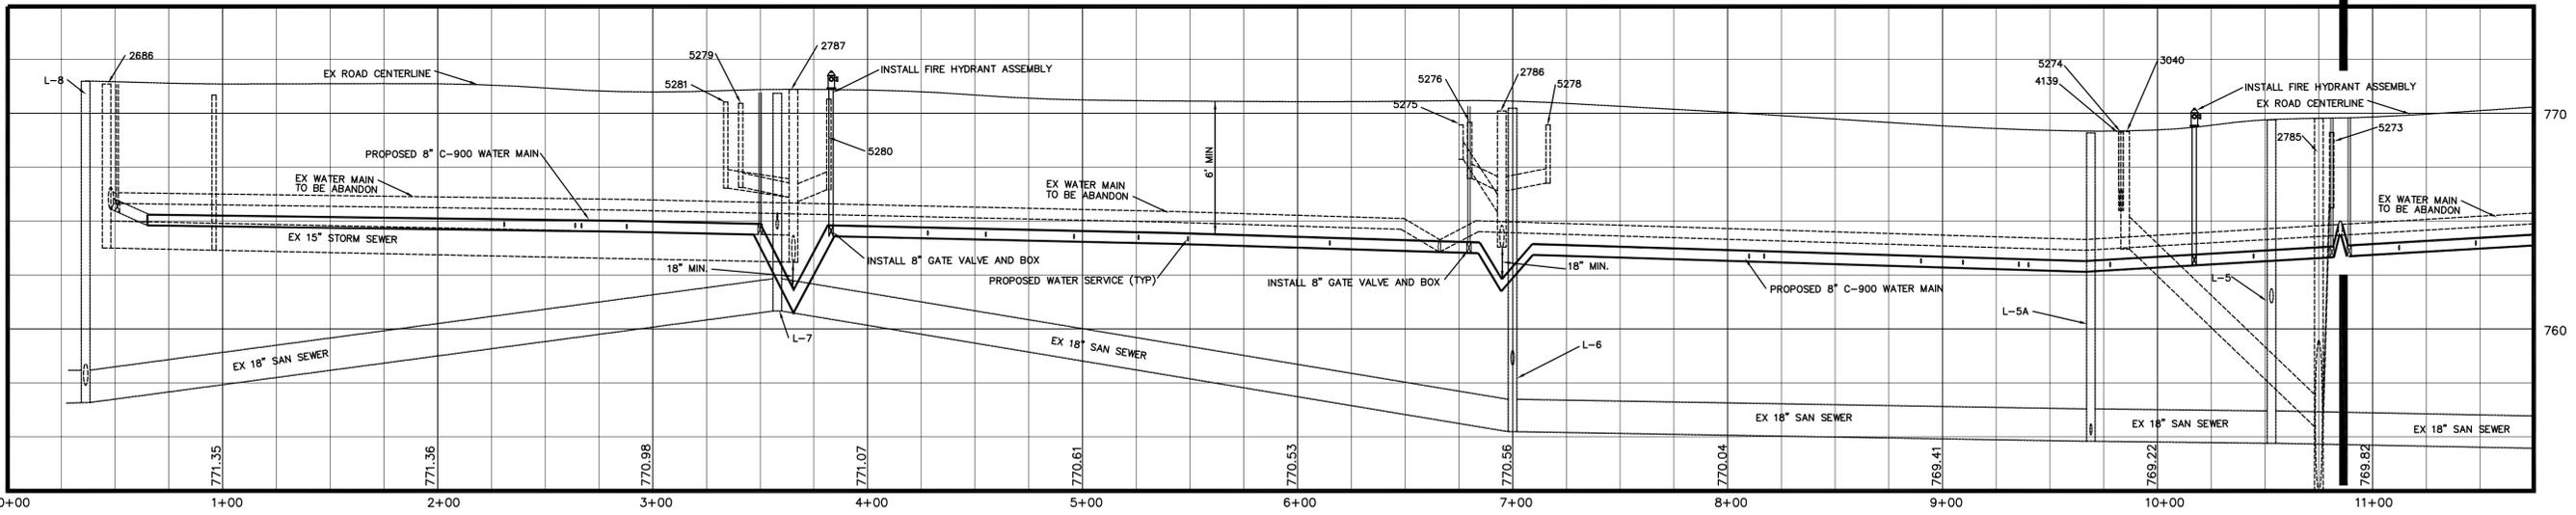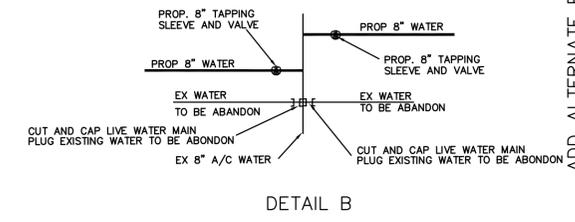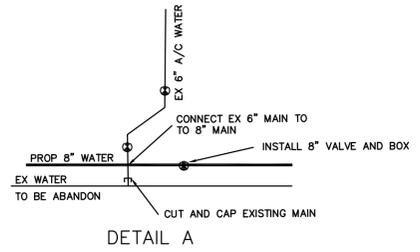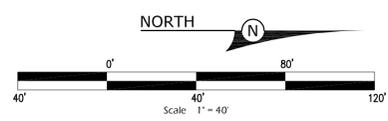

LEGEND

- ⊕ SANITARY MANHOLE
- ⊕ STORM MANHOLE
- TREE
- ⊕ WATER SHUT OFF VALVE
- ⊕ FIRE HYDRANT
- ⊕ CURB STOP
- ⊕ CATCH BASIN
- ⊕ TRAFFIC CONTROL SIGN
- ⊕ LIGHT POLE
- ⊕ SOIL EROSION KEY NUMBER

EXISTING SANITARY STRUCTURES

L-8 SAN SEWER RIM = 771.49 18" INV. N. = 756.59 18" INV. S. = 756.59 12" INV. W. = 757.39 10" INV. E. = 757.49	L-5A SAN SEWER RIM = 769.09 18" INV. N. = 754.79 18" INV. S. = 754.79	L-5 SAN SEWER RIM = 769.69 18" INV. N. = 754.69 18" INV. S. = 754.69 8" INV. E. = 761.19	L-6 SAN SEWER RIM = 755.24 18" INV. N. = 755.24 18" INV. S. = 755.24 8" INV. W. = 758.34 8" INV. E. = 758.34
-------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------

EXISTING STORM STRUCTURES

2686 STORM SEWER RIM = 771.35 15" INV. N. = 763.75 10" INV. NE. = 767.75 15" INV. S. = 763.75 10" INV. SW. = 767.75 10" INV. NW. = 767.55	2787 STORM SEWER RIM = 771.09 12" INV. N. = 765.89 12" INV. E. = 763.09 12" INV. S. = 766.09 12" INV. SW. = 763.09 15" INV. W. = 763.09	5237 STORM SEWER RIM = 769.12 10" INV. SW. = 765.62	5280 STORM SEWER RIM = 770.65 10" INV. S. = 766.45	5275 STORM SEWER RIM = 769.57 6" INV. NW. = 767.97	5276 STORM SEWER RIM = 769.58 8" INV. E. = 766.98	5278 STORM SEWER RIM = 769.45 8" INV. NW. = 766.75	5279 STORM SEWER RIM = 770.45 8" INV. NE. = 766.55
-------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------	----------------------------------------------------------	----------------------------------------------------------	---------------------------------------------------------	----------------------------------------------------------	----------------------------------------------------------

NOTE:

- THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL UTILITIES PRIOR TO THE BORING OPERATION - THE CONTRACTOR SHALL VERIFY ALL SIZE AND TYPES OF PIPE PRIOR TO CONNECTIONS.
- THE CONTRACTOR IS RESPONSIBLE FOR ADDITIONAL REMOVALS AND REPLACEMENT ITEMS FOR LOCATING PURPOSES.
- THE CONTRACTOR IS RESPONSIBLE FOR ALL DAMAGE OCCURRING FROM EXCAVATION OR BORING PROCESS FOR THIS PROJECT.
- THE CONTRACTOR SHALL HAVE ROADS AND DRIVES OPEN AT THE END OF EACH WORK DAY.
- SHOULD THE CONTRACTOR CHOOSE AN OPERATION THAT REQUIRES THEM TO ENTER PRIVATE PROPERTY, PRIOR TO DOING SO SHALL GIVE A COPY OF SAID PERMISSION FROM THE PROPERTY OWNER TO THE CITY INSPECTOR IN WRITING.

- LONG SIDE SERVICES SHALL BE BORED OR TAKEN ACROSS THE ROAD BY MEANS OF A MOLE. THE SERVICES SHALL NOT BE OPEN OUT WITHOUT PRIOR APPROVAL FROM THE CITY ENGINEER.
- THE CONTRACTOR IS RESPONSIBLE FOR PROTECTION OF ALL TREES, EXISTING UTILITIES, AND INFRASTRUCTURE.
- THE CONTRACTOR SHALL PROVIDE NOTICE TO THE CITY OF ANY PLANNED WATERMAIN SHUT DOWN. THE CITY NEEDS ADEQUATE TIME TO PLACE NOTIFICATION TO ITS USERS. IT IS REQUIRED THAT WE NOTIFY CRITICAL USERS 48 HOURS IN ADVANCE, AND ALL OTHER USERS 24 HOURS IN ADVANCE.
- FILTER BAGS WILL BE PLACED IN ALL CATCH BASINS WITHIN THE INFLUENCE OF THIS PROJECT, AND BE MAINTAINED BY THE CONTRACTOR. FABRIC UNDER THE CATCH BASIN COVER IS NOT ACCEPTABLE.
- SHOULD THE CITY BE REQUIRED TO RESPOND TO A CALL RESULTING FROM CONSTRUCTION ACTIVITIES, THE CONTRACTOR SHALL BE RESPONSIBLE FOR REIMBURSEMENT TO THE CITY.



CITY OF MOUNT PLEASANT
DIVISION OF PUBLIC WORKS
1303 N. FRANKLIN ST.
MT. PLEASANT, MICHIGAN 48858
(989)-779-5401
WWW.MT-PLEASANT.ORG

PLAN SHEET
2016 WATER MAIN PROJECT



DESIGN BY BB	CONSTRUCTED
DRAWN BY BB	DATE OF PLAN: JAN. 2016
CHECKED BY ST	SCALE: 1" = 40'
APPROVED BY JZ	SHEET 4 OF 6 SHEETS

REVISIONS _____ DATE/INITIALS _____

CONTROL SECT.	JOB NO.	FED. PROJECT	FED. ITEM NO.
---------------	---------	--------------	---------------




PLOT DATE: _____

DRAWING PATH: _____ FED. ITEM NO. _____ JOB NO. _____ CONTROL SECTION: LOCAL _____

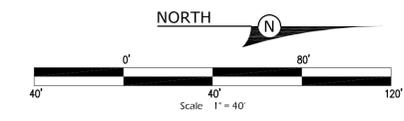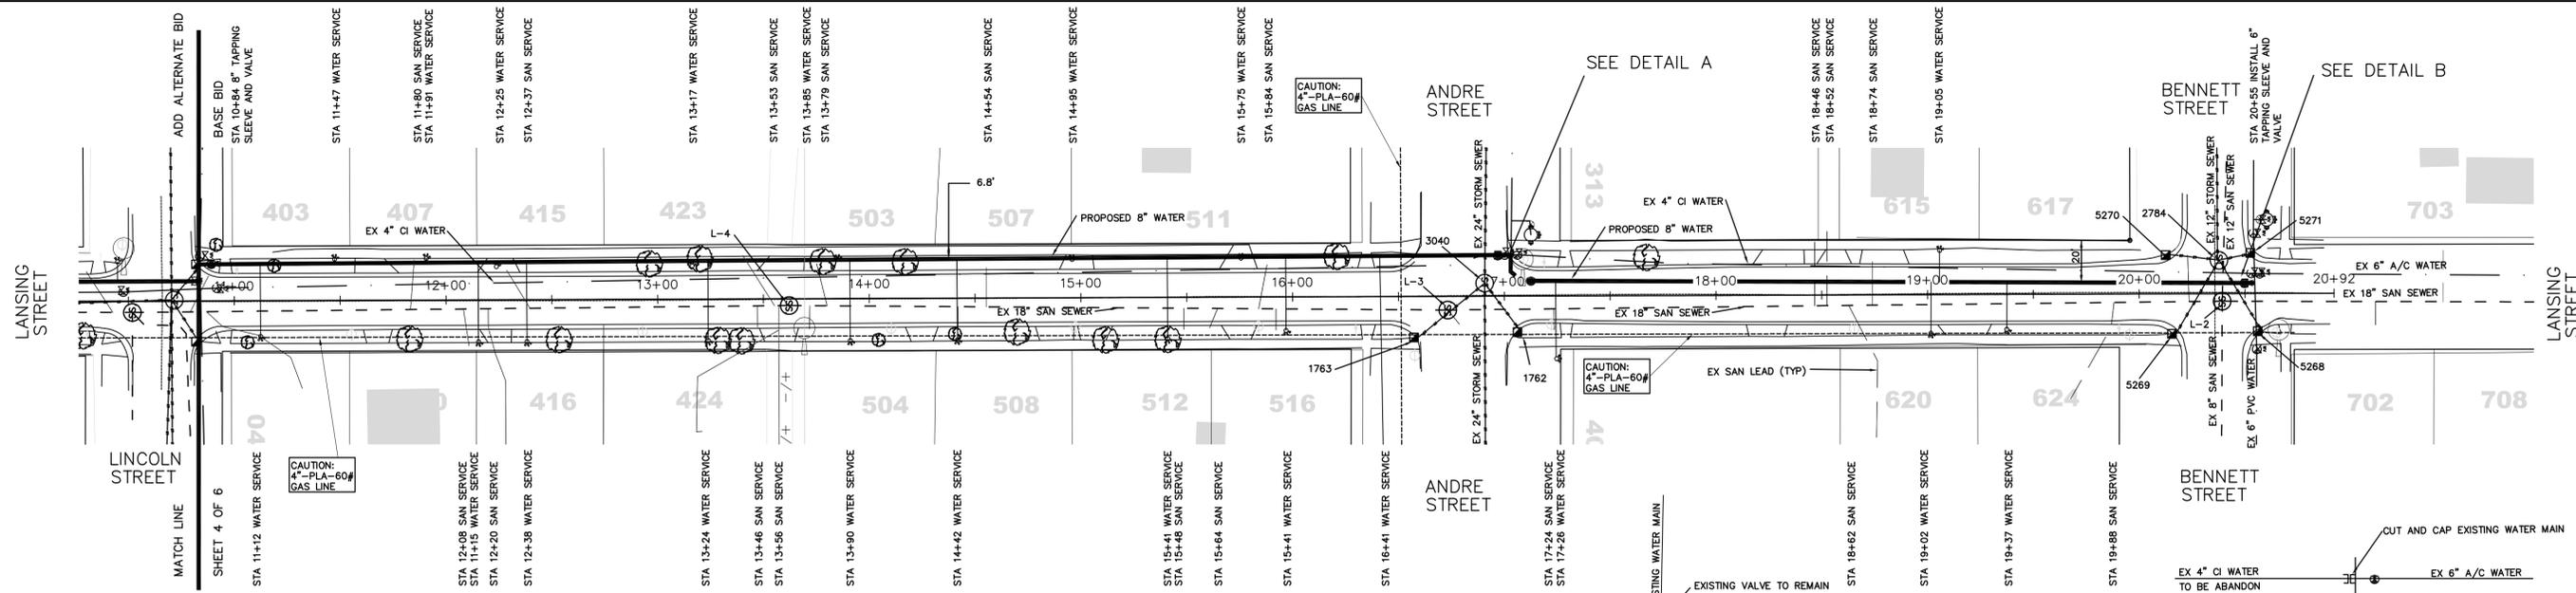

BASE BID QUANTITIES

Water Main, 8 Inch	972 LFT
Water Valve, 8 Inch	2 EA
Tapping Sleeve and Valve, 8x8	1 EA
Tapping Sleeve and Valve, 8x6	1 EA
Water Service - Short, 1 Inch	8 EA
Water Service - Long, 1 Inch	12 EA
Water Main, Cut and Cap	4 EA
Restoration	9.72 STA

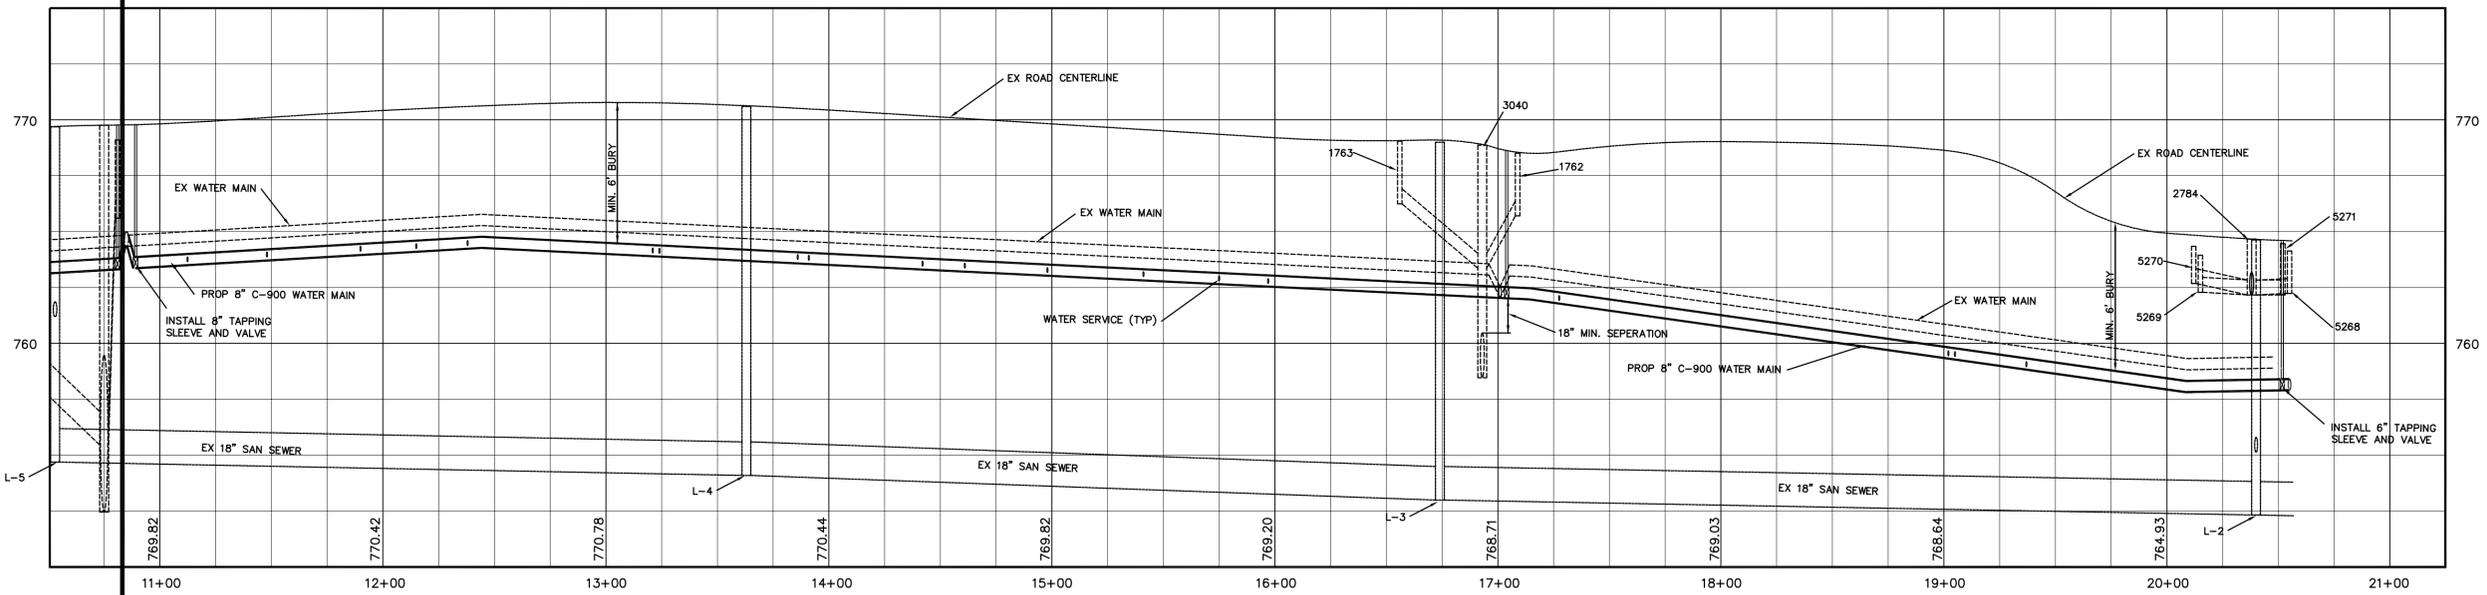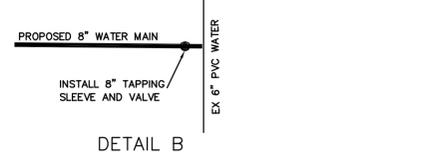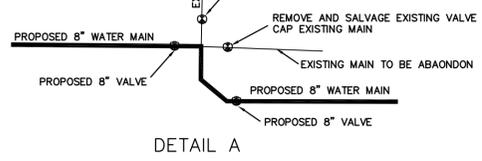

NOTE:

- THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL UTILITIES PRIOR TO THE BORING OPERATION
- THE CONTRACTOR SHALL VERIFY ALL SIZE AND TYPES OF PIPE PRIOR TO CONNECTIONS.
- THE CONTRACTOR IS RESPONSIBLE FOR ADDITIONAL REMOVALS AND REPLACEMENT ITEMS FOR LOCATING PURPOSES.
- THE CONTRACTOR IS RESPONSIBLE FOR ALL DAMAGE OCCURRING FROM EXCAVATION OR BORING PROCESS FOR THIS PROJECT.
- THE CONTRACTOR SHALL HAVE ROADS AND DRIVES OPEN AT THE END OF EACH WORK DAY.
- SHOULD THE CONTRACTOR CHOOSE AN OPERATION THAT REQUIRES THEM TO ENTER PRIVATE PROPERTY, PRIOR TO DOING SO SHALL GIVE A COPY OF SAID PERMISSION FROM THE PROPERTY OWNER TO THE CITY INSPECTOR IN WRITING.

- LONG SIDE SERVICES SHALL BE BORED OR TAKEN ACROSS THE ROAD BY MEANS OF A MOLE, THE SERVICES SHALL NOT BE OPEN CUT WITHOUT PRIOR APPROVAL BY THE CITY ENGINEER.
- THE CONTRACTOR IS RESPONSIBLE FOR PROTECTION OF ALL TREES, EXISTING UTILITIES, AND INFRASTRUCTURE.
- THE CONTRACTOR SHALL PROVIDE NOTICE TO THE CITY OF ANY PLANNED WATERMAIN SHUT DOWN. THE CITY NEEDS ADEQUATE TIME TO PLACE NOTIFICATION TO ITS USERS. IT IS REQUIRED THAT WE NOTIFY CRITICAL USERS 48 HOURS IN ADVANCE, AND ALL OTHER USERS 24 HOURS IN ADVANCE.
- FILTER BAGS WILL BE PLACED IN ALL CATCH BASINS WITHIN THE INFLUENCE OF THIS PROJECT, AND BE MAINTAINED BY THE CONTRACTOR. FABRIC UNDER THE CATCH BASIN COVER IS NOT ACCEPTABLE.
- SHOULD THE CITY BE REQUIRED TO RESPOND TO A CALL RESULTING FROM CONSTRUCTION ACTIVITIES, THE CONTRACTOR SHALL BE RESPONSIBLE FOR REIMBURSEMENT TO THE CITY.

LEGEND

- ⊕ SANITARY MANHOLE
- ⊕ STORM MANHOLE
- ⊕ TREE
- ⊕ WATER SHUT OFF VALVE
- ⊕ FIRE HYDRANT
- ⊕ CURB STOP
- ⊕ CATCH BASIN
- ⊕ TRAFFIC CONTROL SIGN
- ⊕ LIGHT POLE
- ⊕ SOIL EROSION KEY NUMBER

EXISTING SANITARY STRUCTURES

- L-2
RIM = 764.59
18" INV. N. = 752.29
8" INV. E. = 752.59
18" INV. S. = 752.19
8" INV. W. = 752.59
8" INV. W. = 755.39
- L-3
RIM = 769.04
18" INV. N. = 753.04
18" INV. S. = 753.04
- L-4
RIM = 770.61
18" INV. N. = 754.11
18" INV. S. = 754.11

EXISTING STORM STRUCTURES

- 3040
RIM = 768.93
6" INV. NE. = 763.43
24" INV. E. = 758.53
6" INV. SE. = 764.13
6" INV. SW. = 763.53
24" INV. W. = 758.53
6" INV. NW. = 762.63
- 2784
RIM = 764.69
8" INV. N. = 762.19
8" INV. E. = 762.19
8" INV. S. = 762.19
12" INV. W. = 762.09
- 5269
RIM = 763.93
8" INV. NW. = 762.13
- 5270
RIM = 764.39
8" INV. SE. = 763.06
- 5271
RIM = 763.93
8" INV. SE. = 762.13
- 5268
RIM = 764.63
8" INV. SW. = 762.73

CALL MISS DIG
BEFORE DIGGING UNDERGROUND OR WORKING NEAR OVERHEAD WIRES, CALL MISS DIG AT LEAST 3 BUSINESS DAYS IN ADVANCE OF STARTING YOUR PROJECT. (800) 482-7171
IT'S THE LAW

CITY OF MOUNT PLEASANT
DIVISION OF PUBLIC WORKS
1303 N. FRANKLIN ST.
MT. PLEASANT, MICHIGAN 48858
(989)-779-5401
WWW.MT-PLEASANT.ORG

2016 WATER MAIN PROJECT

DESIGN BY BB	CONSTRUCTED
DRAWN BY BB	DATE OF PLAN: JAN. 2016
CHECKED BY ST	SCALE: 1" = 40'
APPROVED BY JZ	SHEET 5 OF 6 SHEETS

REVISIONS: _____ DATE/INITIALS

CONTROL SECT.	JOB NO.	FED. PROJECT	FED. ITEM NO.
---------------	---------	--------------	---------------

PLOT DATE: _____


DRAWING PATH: _____ FED. ITEM NO. _____ JOB NO. _____ CONTROL SECTION: LOCAL _____ 2015 LOCAL STREET RECONSTRUCTION

MICHIGAN UNIFIED KEYING SYSTEM

SOIL EROSION SEDIMENTATION CONTROL MEASURES

* INDICATES APPLICABILITY OF A SPECIFIC CONTROL MEASURE TO ONE OR MORE OF THE SEVEN PROBLEM AREAS

KEY	DETAIL	CHARACTERISTICS	PROBLEM AREAS							KEY	DETAIL	CHARACTERISTICS	PROBLEM AREAS								
			A	B	C	D	E	F	G				A	B	C	D	E	F	G		
1	STRIPPING & STOCKPILING TOPSOIL	TOPSOIL MAY BE STOCKPILED ABOVE BORROW AREAS TO ACT AS A DIVERSION. STOCKPILE SHOULD BE TEMPORARILY SEEDED.	*					*	*		28	DROP SPILLWAY	SLOWS VELOCITY OF FLOW, REDUCES EROSION CAPACITY		*	*					
2	SELECTIVE GRADING & SHAPING	WATER CAN BE DIVERTED TO MINIMIZE EROSION. FLATTER SLOPES EASE EROSION PROBLEMS.	*					*	*	*	29	PIPE DROP	REDUCES RUNOFF VELOCITY. REMOVES SEDIMENT AND TURBIDITY. CAN BE DESIGNED TO HANDLE LARGE VOLUMES OF FLOW.			*	*				
3	GRUBBING OMITTED	SAVES COST OF GRUBBING, PROVIDES NEW SPROUTS, RETAINS EXISTING ROOT MAT SYSTEM, REDUCES WIND FALLOUT AT NEW FOREST EDGE. DISCOURAGES EQUIPMENT ENTRANCE.	*					*	*		30	PIPE SPILLWAY	REMOVES SEDIMENT AND TURBIDITY FROM RUNOFF. MAY BE PART OF PERMANENT EROSION CONTROL PLAN.			*	*				
4	VEGETATIVE STABILIZATION	MAY UTILIZE A VARIETY OF PLANT MATERIAL. STABILIZES SOIL. SLOWS RUNOFF VELOCITY. FILTERS SEDIMENT FROM RUNOFF.	*	*	*		*	*	*	31	ENERGY DISSIPATER	SLOWS RUNOFF VELOCITY TO NON-EROSIVE LEVEL. PERMITS SEDIMENT COLLECTION FROM RUNOFF.		*	*	*					
5	SEEDING	INDISPENSIBLE AND VERY EFFECTIVE. STABILIZES SOIL. THUS MINIMIZING EROSION. PERMITS RUNOFF TO INFILTRATE SOIL. REDUCING RUNOFF VOLUME. SHOULD INCLUDE PREPARED TOPSOIL BED.	*	*	*		*	*	*	32	LEVEL SPREADER	CONVERTS COLLECTED CHANNEL OR PIPE FLOW BACK TO SHEET FLOW. AVOIDS CHANNEL EROSION AND CONSTRUCTION OFF PROJECT SITE. SIMPLE TO CONSTRUCT.			*	*					
6	SEEDING WITH MULCH AND/OR MATTING	FACILITATES ESTABLISHMENT OF VEGETATIVE COVER. EFFECTIVE FOR DRAINAGEWAYS WITH LOW VELOCITY. EARLY PLACED IN SMALL QUANTITIES BY EXPERIENCED PERSONNEL. SHOULD INCLUDE PREPARED TOPSOIL BED.	*	*	*		*	*	*	33	SEDIMENTATION TRAP	MAY BE CONSTRUCTED OF A VARIETY OF MATERIALS. TRAPS SEDIMENT AND REDUCES VELOCITY OF FLOW. CAN BE CLEANED AND EXPANDED AS NEEDED.		*	*						
7	HYDRO-SEEDING	EFFECTIVE ON LARGE AREAS. MULCH TACKING AGENT USED TO PROVIDE IMMEDIATE PROTECTION UNTIL GRASS IS ROOTED. SHOULD INCLUDE PREPARED TOPSOIL BED.	*				*	*	*	34	SEDIMENT BASIN	TRAPS SEDIMENT. RELEASES RUNOFF AT NON-EROSIVE RATES. CONTROLS RUNOFF AT SYSTEM OUTLETS. CAN BE VISUAL MONITORED.		*	*	*					
8	SODDING	PROVIDES IMMEDIATE PROTECTION. CAN BE USED ON STEEP SLOPES WHERE SEED MAY BE DIFFICULT TO ESTABLISH. EASY TO PLACE. MAY BE REPAIRED IF DAMAGED. SHOULD INCLUDE PREPARED TOPSOIL BED.	*	*	*		*	*	*	35	STORM SEWER	SYSTEM REMOVES COLLECTED RUNOFF FROM SITE, PARTICULARLY FROM PAVED AREAS. CAN ACCEPT LARGE CONCENTRATIONS OF RUNOFF. CONDUCTS RUNOFF TO MUNICIPAL SEWER SYSTEM OR STABILIZED OUTFALL LOCATION. USE CATCH BASINS TO COLLECT SEDIMENT.			*	*					*
9	VEGETATIVE BUFFER STRIP	SLOWS RUNOFF VELOCITY. FILTERS SEDIMENT FROM RUNOFF. REDUCES VOLUME OF RUNOFF ON SLOPES.	*	*			*	*	*	36	CATCH BASIN, DRAIN INLET	COLLECTS HIGH VELOCITY CONCENTRATED RUNOFF. MAY USE FILTER CLOTH OVER INLET.			*	*					*
10	MULCHING	USED ALONE TO PROTECT EXPOSED AREAS FOR SHORT PERIODS. PROTECTS SOIL FROM IMPACT OF FALLING RAIN. PRESERVES SOIL MOISTURE AND PROTECTS GERMINATING SEED FROM TEMPERATURE EXTREMES.	*				*	*	*	37	SOD FILTER	INDISPENSIBLE AND EASY TO CONSTRUCT. PROVIDES IMMEDIATE PROTECTION. PROTECTS AREAS AROUND INLETS FROM EROSION.			*	*					
11	ROUGHENED SURFACE	REDUCES VELOCITY AND INCREASES INFILTRATION RATES. COLLECTS SEDIMENT. HELPS WATER, SEED, AND MULCH BETTER THAN SMOOTH SURFACES.	*				*	*	*	38	STRAW BALE FILTER	INDISPENSIBLE AND EASY TO CONSTRUCT. CAN BE LEANED AS NECESSARY TO COLLECT SEDIMENT. MAY BE USED IN CONJUNCTION WITH SNOW FENCE FOR ADDED STABILITY.			*	*					*
12	COMPACTION	HELPS HOLD SOIL IN PLACE, MAKING EXPOSED AREAS LESS VULNERABLE TO EROSION.	*				*	*	*	39	ROCK FILTER	CAN UTILIZE MATERIAL FOUND ON SITE. EASY TO CONSTRUCT. FILTERS SEDIMENT FROM RUNOFF.			*	*					*
13	RRIPRAP, RUBBLE, CAGIONS	USED WHERE VEGETATION IS NOT EASILY ESTABLISHED. EFFECTIVE FOR HIGH VELOCITIES OR HIGH CONCENTRATIONS. PERMITS RUNOFF TO INFILTRATE SOIL. DISSIPATES ENERGY FLOW AT SYSTEM OUTLETS.	*	*	*		*	*	*	40	INLET SEDIMENT TRAP	EASY TO SHAPE. COLLECTS SEDIMENT. MAY BE CLEANED AND EXPANDED AS NEEDED.			*	*					*
14	AGGREGATE COVER	STABILIZES SOIL SURFACE, THUS MINIMIZING EROSION. PERMITS CONSTRUCTION TRAFFIC IN ADVERSE WEATHER. MAY BE USED AS PART OF PERMANENT BASE CONSTRUCTION OF PAVED AREAS.					*	*	*	41	STONE AND ROCK CROSSING	MAY BE ROCK OR CLEAN RUBBLE. MINIMIZES STREAM TURBIDITY. NEVERTHELESS, MAY ALSO SERVE AS DITCH CHECK OR SEDIMENT TRAP.			*	*					*
15	PAVING	PROTECTS AREAS WHICH CANNOT OTHERWISE BE PROTECTED, BUT INCREASES RUNOFF VOLUME AND VELOCITY. IRREGULAR SURFACE WILL HELP SLOW VELOCITY.	*				*	*	*	42	TEMPORARY CULVERT	ELIMINATES STREAM TURBULENCE AND TURBIDITY. PROVIDES UNOBSTRUCTED PASSAGE FOR FISH AND OTHER WATER LIFE. CAPACITY FOR NORMAL FLOW CAN BE PROVIDED WITH STORM WATER FLOWING OVER ROADWAY.			*	*					*
16	CURB & GUTTER	KEEPS HIGH VELOCITY RUNOFF ON PAVED AREAS FROM LEAVING PAVED SURFACE. COLLECTS AND CONDUCTS RUNOFF TO ENCLOSED DRAINAGE SYSTEM OR PREPARED DRAINAGEWAY.					*	*	*	43	CULVERT SEDIMENT TRAP	EASY TO INSTALL AT INLET. KEEPS CULVERT CLEAN AND FREE FLOWING. MAY BE CONSTRUCTED OF LUMBER OR LOGS.			*	*					*
17	BENCHES	REDUCES RUNOFF VELOCITY BY REDUCING EFFECTIVE SLOPE LENGTH. COLLECTS SEDIMENT. PROVIDES ACCESS TO SLOPES FOR SEEDING, MULCHING AND MAINTENANCE.	*				*	*	*	44	CULVERT SEDIMENT TRAP	DEFLECTS CURRENTS AWAY FROM STREAMBANK AREAS.			*	*					*
18	DIVERSION BERM	DIVERTS WATER FROM VULNERABLE AREAS. COLLECTS AND DIVERTS WATER TO PREPARED DRAINAGEWAYS. MAY BE PLACED AS PART OF NORMAL CONSTRUCTION OPERATION.	*				*	*	*	45	TEMP. STREAM CHANNEL CHANGE	NEW CHANNEL KEEPS NORMAL FLOWS AWAY FROM CONSTRUCTION. REQUIRES STATE PERMIT.			*	*					*
19	DIVERSION DITCH	COLLECTS AND DIVERTS WATER TO REDUCE EROSION POTENTIAL. MAY BE INCORPORATED IN PERMANENT PROJECT DRAINAGE SYSTEMS.	*				*	*	*	46	SHEET PILING	PROTECTS EROSION BANK AREAS FROM STREAM CURRENTS DURING CONSTRUCTION. MINIMAL DISRUPTION WHEN REMOVED.			*	*					*
20	BERM & DITCH	DIVERTS WATER TO A PREPARED DRAINAGEWAY. MAY BE USED AT INTERVALS ACROSS SLOPE FACE TO REDUCE EFFECTIVE SLOPE LENGTH.	*				*	*	*	47	COFFERDAM	WORK CAN BE CONTINUED DURING MOST ANTICIPATED STREAM CONDITIONS. CLEAR WATER CAN BE PUMPED DIRECTLY BACK INTO STREAM.			*	*					*
21	FILTER BERM	CONSTRUCTED OF GRAVEL OR STONE. INTERCEPTS AND DIVERTS RUNOFF TO STABILIZED AREAS OR PREPARED DRAINAGE SYSTEMS. SLOWS RUNOFF AND COLLECTS SEDIMENT.	*	*	*		*	*	*	48	CONSTRUCTION DAM	PERMITS WORK TO CONTINUE DURING NORMAL STREAM STAGES. CONTROLLED FLOODING CAN BE ACCOMPLISHED DURING PERIODS OF INACTIVITY.			*	*					*
22	BRUSH FILTER	USES SLASH AND LOGS FROM CLEARING OPERATIONS. CAN BE COVERED AND SEEDED RATHER THAN REMOVED. ELIMINATES NEED FOR BORROW OR REMOVAL OF MATERIAL FROM SITE.	*				*	*	*	49	CHECK DAMS	REDUCES FLOW VELOCITY. CATCHES SEDIMENT. CAN BE CONSTRUCTED OF LOGS, STRAK, HAY, ROCK, LUMBER, MASONRY, OR SAND BAGS.			*	*					*
23	BARE CHANNEL	LEAST EXPENSIVE FORM OF DRAINAGEWAY. MAY BE USED ONLY WHERE GRADIENT IS VERY LOW AND WITH SOILS OF MINIMUM EROSION POTENTIAL.					*	*	*	50	WEIR	CONTROLS SEDIMENTATION IN LARGE STREAMS. CAUSES MINIMAL TURBIDITY.			*	*					*
24	GRASSED WATERWAY	MUCH MORE STABLE FORM OF DRAINAGEWAY THAN BARE CHANNEL. GRASS TENDS TO SLOW RUNOFF AND FILTER OUT SEDIMENT. USED WHERE BARE CHANNEL WOULD BE ERODED.					*	*	*	51	RETAINING WALL	REDUCES GRADIENT WHERE SLOPES ARE EXTREMELY STEEP. PERMITS RETENTION OF EXISTING VEGETATION, KEEPING SOIL STABLE IN CRITICAL AREAS. MINIMIZES MAINTENANCE.			*	*					*
25	SLOPE DRAIN (SURFACE PIPE)	PREVENTS EROSION ON SLOPES WHEN RUNOFF CANNOT BE DIVERTED TO EDGE OF SLOPE AREA. USUALLY PERMANENT. CAN BE CONSTRUCTED OR EXTENDED AS GRADING PROGRESSES.	*				*	*	*	52	SEEPAGE CONTROL	PREVENTS PIPING AND SOIL SLURPAGE ON OUT SLOPES.			*	*					*
26	SLOPE DRAIN (PIPE CHUTE)	PREVENTS EROSION ON SLOPES WHEN RUNOFF CANNOT BE DIVERTED TO EDGE OF SLOPE AREA. USUALLY PERMANENT. CAN BE CONSTRUCTED OR EXTENDED AS GRADING PROGRESSES.	*				*	*	*	53	WINDBREAK	MINIMIZES WIND EROSION. MAY BE SNOW FENCE.			*	*					*
27	SLOPE DRAIN (SUBSURFACE PIPE)	PREVENTS EROSION ON SLOPES WHEN RUNOFF CANNOT BE DIVERTED TO EDGE OF SLOPE AREA. USUALLY PERMANENT. CAN BE CONSTRUCTED AS GRADING PROGRESSES.	*				*	*	*	54	SILT FENCE	USES GEOTEXTILE FABRIC AND POSTS OR POLES. EASY TO CONSTRUCT AND LOCATE AS NECESSARY.			*	*					*

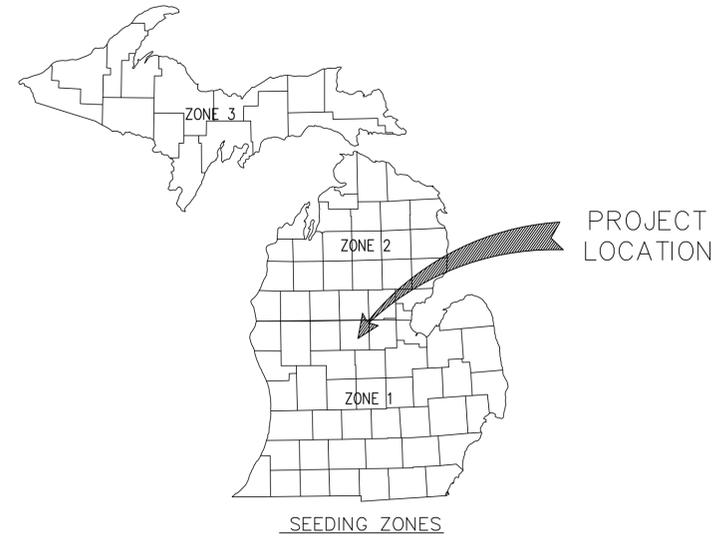

PERMANENT SEEDING GUIDE

	APR	MAY	JUN	JUL	AUG	SEP	OCT	
IRRIGATED AND/OR MULCH								ZONE 1
WITHOUT IRRIGATION OR MULCH								ZONE 2
IRRIGATED AND/OR MULCH								ZONE 3
WITHOUT IRRIGATION OR MULCH								ZONE 3

TEMPORARY SEEDING GUIDE

		APR	MAY	JUN	JUL	AUG	SEP	OCT	
ZONE 1									
TYPE OF SEED	SPRING OATS/BARLEY OR DOMESTIC RYEGRASS								
	SUDANGRASS								
	RYE OR PERENNIAL RYE								
	WHEAT								
ZONE 2									
TYPE OF SEED	SPRING OATS/BARLEY OR DOMESTIC RYEGRASS								
	SUDANGRASS								
	RYE OR PERENNIAL RYE								
	WHEAT								
ZONE 3									
TYPE OF SEED	SPRING OATS/BARLEY OR DOMESTIC RYEGRASS								
	SUDANGRASS								
	RYE OR PERENNIAL RYE								
	WHEAT								

SOIL EROSION/SEDIMENTATION CONTROL OPERATION TIME SCHEDULE

CONSTRUCTION SEQUENCE	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
STRIP & STOCKPILE TOPSOIL												
ROUGH GRADE SEDIMENT CONTROL												
TEMP. CONTROL MEASURES												
STORM FACILITIES												
SITE CONSTRUCTION												
PERM. CONTROL MEASURES												
FINISH GRADING												

SOIL EROSION & SEDIMENTATION CONTROL

- DEVELOPER/PROPERTY OWNER SHALL SUBMIT A DETAILED EROSION CONTROL PLAN AND OBTAIN A SOIL EROSION & SEDIMENTATION CONTROL PERMIT PRIOR TO ANY EARTH CHANGES. CONSTRUCTION OPERATION SHALL BE SCHEDULED AND PERFORMED SO THAT PREVENTATIVE EROSION CONTROL MEASURES ARE IN PLACE PRIOR TO EXCAVATION AND TEMPORARY STABILIZATION MEASURES ARE IN PLACE IMMEDIATELY FOLLOWING BACKFILLING AND/OR GRADING OPERATIONS.
- BORROW AND FILL DISPOSAL AREAS WILL BE SELECTED AND APPROVED AT TIME OF PLAN REVIEW. SPECIAL PRECAUTIONS WILL BE TAKEN IN THE USE OF CONSTRUCTION EQUIPMENT TO PREVENT SITUATIONS THAT PROMOTE EROSION.
- CLEANUP WILL BE DONE IN A MANNER TO INSURE THAT EROSION CONTROL MEASURES ARE NOT DISTURBED.
- THE PROJECT WILL CONTINUALLY BE INSPECTED FOR SOIL EROSION AND SEDIMENT CONTROL COMPLIANCE. DEFICIENCIES WILL BE CORRECTED BY THE DEVELOPER WITHIN 24 HOURS.
- TEMPORARY EROSION CONTROL MEASURES SHALL BE COMPLETELY REMOVED BY THE DEVELOPER UPON ESTABLISHMENT OF PERMANENT CONTROL MEASURES.
- ALL TEMPORARY SOIL EROSION CONTROL MEASURES MUST BE REMOVED FROM ROAD RIGHT-OF-WAY AREAS PRIOR TO ACCEPTANCE OF STREETS FOR ROUTINE MAINTENANCE.
- VEGETATION MUST BE ACCEPTABLY ESTABLISHED PRIOR TO FINAL RELEASE OF THE CONSTRUCTION GUARANTEE BY THE DESIGNATED SOIL EROSION SEDIMENTATION CONTROL AGENT.

STREAM CROSSING NOTES

- CONSTRUCTION OF STREAM CROSSINGS SHALL BE SUBJECT TO THE SPECIFICATIONS FOR PROTECTION OF NATURAL RESOURCES AT UTILITY CROSSINGS AS GIVEN IN THE ADMINISTRATIVE RULES FOR ACT 346(RULES 24-29).
- A SILTATION BARRIER SHALL BE CONSTRUCTED IMMEDIATELY DOWNSTREAM OF THE CONSTRUCTION SITE PRIOR TO THE COMMENCEMENT OF ANY CONSTRUCTION ACTIVITIES. (SEE MICHIGAN UNIFIED KEYING SYSTEM FOR SPECIFIED BARRIER) THE SILTATION BARRIER SHALL BE MAINTAINED IN GOOD WORKING ORDER THROUGHOUT THE DURATION OF THE PROJECT.
- BACKFILL SHALL CONSIST OF INERT MATERIALS WHICH WILL NOT CAUSE SILTATION NOR CONTAIN SOLUBLE CHEMICALS OR ORGANIC MATTER WHICH IS BIODEGRADABLE. ALL FILL SHALL BE CONTAINED IN SUCH A MANNER SO AS NOT TO ERODE INTO ANY WATERCOURSE.
- ALL RAW BANKS SHALL BE STABILIZED WITH RIPRAP TO THREE FEET ABOVE THE ORDINARY HIGH WATERMARK, THEN SEEDED, FERTILIZED AND MULCHED, OR SODDED TO PREVENT EROSION.
- UPON PROJECT COMPLETION THE EXCESS SPOILS SHALL BE REMOVED AND DISPOSED OF IN AN APPROVED UPLAND SITE.
- SILTATION BARRIER MAY BE REMOVED UPON PLACEMENT OF PERMANENT EROSION CONTROL MEASURES.

CONSTRUCTION SEQUENCE

- EXCAVATION AND STOCKPILING OF SOIL.
- IMPLEMENTATION OF TEMPORARY EROSION CONTROL MEASURES; SELECTIVE GRADING, DIVERSIONS AS REQUIRED IN FIELD, PROTECTION OF STORM SEWER FACILITIES.
- PERIODIC MAINTENANCE OF AFFECTED EROSION CONTROL MEASURES.
- PERMANENT MEASURES; FINAL GRADING, SEEDING AND MULCHING.



CITY OF MOUNT PLEASANT
DIVISION OF PUBLIC WORKS
1303 N. FRANKLIN ST.
MT. PLEASANT, MICHIGAN 48858
(989)-779-5401
WWW.MT-PLEASANT.ORG

SOIL EROSION CONTROL KEY 2016 WATER MAIN PROJECT

DESIGN BY: ST	CONSTRUCTED	DATE OF PLAN	JAN. 2016
DRAWN BY: ST	CHECKED BY: BB	SCALE: NONE	SHEET 6 OF 6 SHEETS
APPROVED BY: JZ			
REVISIONS		DATE/INITIALS	
CONTROL SECT.	JOB NO.	FED. PROJECT	FED. ITEM NO.
PLOT DATE: SDATES			

DRAWING PATH: FED. ITEM NO. JOB NO. CONTROL SECTION: 2016 WATER MAIN PROJECT